


DENON

Hi-Fi Stereo Power Amplifier

SERVICE MANUAL MODEL POA-2200

SOLID STATE
STEREO POWER AMPLIFIER

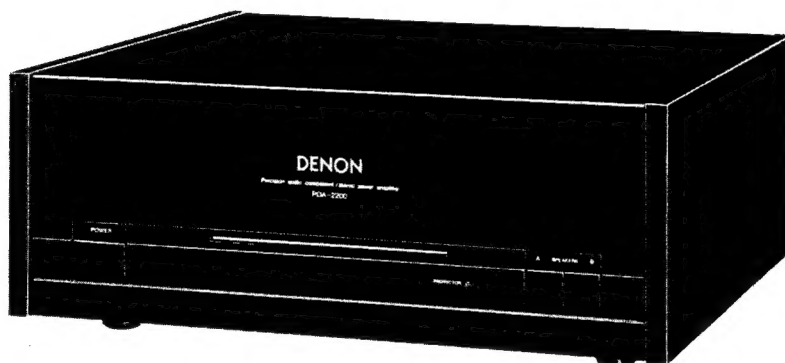

Wood side panels are optional.

TABLE OF CONTENTS

SPECIFICATIONS	2
NAMES AND FUNCTIONS OF PARTS	3
CONNECTIONS	4
REMOVAL OF EACH SECTION	5
METHOD OF ADJUSTMENTS	6
ALIGNMENT POINTS	7
TROUBLESHOOTING	8
BLOCK DIAGRAM	9
SEMICONDUCTORS	9
PRINTED WIRING BOARD PATTERNS AND PARTS LIST	
ETC9070 POWER UNIT	10
ETC9071 SUPPLY UNIT	12
WIRING DIAGRAM	14
SCHEMATIC DIAGRAM	15
EXPLODED VIEW OF CHASSIS AND CABINET & PARTS LIST	16

NIPPON COLUMBIA CO., LTD.

SPECIFICATIONS

Rated output power: (both channels driven)		220W per channel min, RMS with both channels driven into 8 ohms from 20 Hz to 20 kHz with no more than 0.02% total harmonic distortion (U.S.A.) 200 W + 200 W (8 ohms, 20 Hz — 20 kHz) 300 W + 300 W (4 ohms, DIN 1 kHz) 200 W + 200 W (6 ohms 1 kHz, IEC) (For temperature test by IEC)	S/N ratio: 123 dB (A-weighting)
Dynamic Power:		450 W + 450 W (at 4 ohms) 600 W + 600 W (at 2 ohms)	Slew rate: ±500 V/μsec
Total harmonic distortion:		Less than 0.002% (—3 dB at rated output, 8 ohms)	Output terminals
Intermodulation distortion:		Less than 0.002% (80 Hz/7 kHz: 4/1 at rated output, 8 ohms)	Speakers: A or B — 6 ohms A + B — 12 ohms
Power band width:		5 Hz — 80 kHz (8 ohms, THD 0.03%)	Self diagnostic function: Display lights
Frequency response:		1 Hz — 300 kHz + 0, —3 dB (at 1 W)	General
Input sensitivity:		1V (Normal in) 1.3 V (CD in)	Power supply: Germany and France AC 220 V/50 Hz U.K. and Australia AC 240 V/50 Hz U.S.A. and Canada AC 120 V/60 Hz Asia AC 110/120/220/240 V 50/60 Hz (Multiple)
Input impedance:		25 k ohms (Normal in) 30 k ohms (CD in)	Power consumption: 7.5A or 400 W (U.S.A.) 7.5 A (Canada) 320 W (IEC) 340 W (Multiple)
Output impedance:		0.1 ohm (1 kHz)	Dimensions: 434 mm (17-3/32") W x 184 mm (7-1/4") H x 418 mm (16-29/64") D (Including control knobs and feet)
			Weight: 17.3 kg (38 lbs 3 oz)

Design and specifications are subject to change without prior notice.

NOTE: The following codes correspond to the appropriate models.
E2 for Europe, EU for U.S.A., EA for Australia, EK for U.K.
E1 for Asia and EC for Canada.
This Service Manual is prepared based on EU Black Version.

For United Kingdom model only.

WARNING:

As the colours of the wires in the mains lead of this appliance may not correspond with the coloured markings identifying the terminals in your plug proceed as follows:

The wire which is coloured blue must be connected to the terminal which is marked with the letter N or coloured black.
The wire which is coloured brown must be connected to the terminal which is marked with the letter L or coloured red.

The wire which is coloured BROWN must be connected to the terminal which is marked with the letter L or coloured RED.

IMPORTANT

The wires in this mains lead are coloured in accordance with the following code:

Blue: Neutral
Brown: Live

For Australia model only.

FOR YOUR SAFETY

To ensure safe operation the three-pin plug supplied must be inserted only into a standard three-pin power point which is effectively earthed through the normal household wiring.

Extension cords used with the equipment must be three-core and be correctly wired to provide connection to earth. Wrongly wired extension cords are a major cause of fatalities.

The fact that the equipment operates satisfactorily does not imply that the power point is earthed and that the installation is completely safe. For your safety, if in any doubt about the effective earthing of the power point, consult a qualified electrician.

For U.S.A. and Canada models.

CAUTION

TO PREVENT ELECTRIC SHOCK DO NOT USE THIS (POLARIZED) PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLET UNLESS THE BLADES CAN BE FULLY INSERTED TO PREVENT BLADE EXPOSURE.

NAMES AND FUNCTIONS OF PARTS

• FRONT PANEL

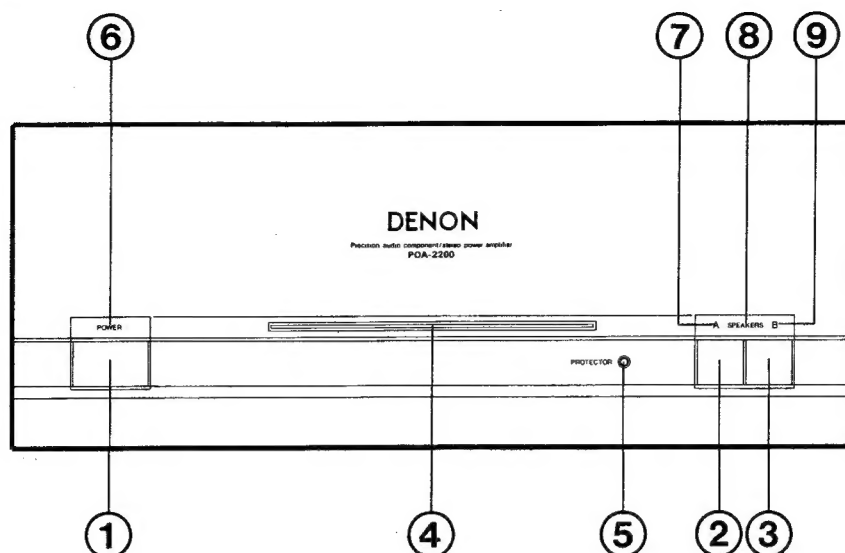


Fig. 1

- | | |
|---|---|
| ① POWER (Power Switch) | ⑤ PROTECTOR |
| ② SPEAKERS-A (Speaker Select Switch-A) | ⑥ POWER (Power Indicator) |
| ③ SPEAKERS-B (Speaker Select Switch-B) | ⑦ "A" (Speaker "A" Indicator) |
| ④ SELF-DIAGNOSIS (Self-diagnostic Result Indicator Lamps) | ⑧ SPEAKERS (Speaker Function Indicator) |
| | ⑨ "B" (Speaker "B" Indicator) |

• BACK PANEL


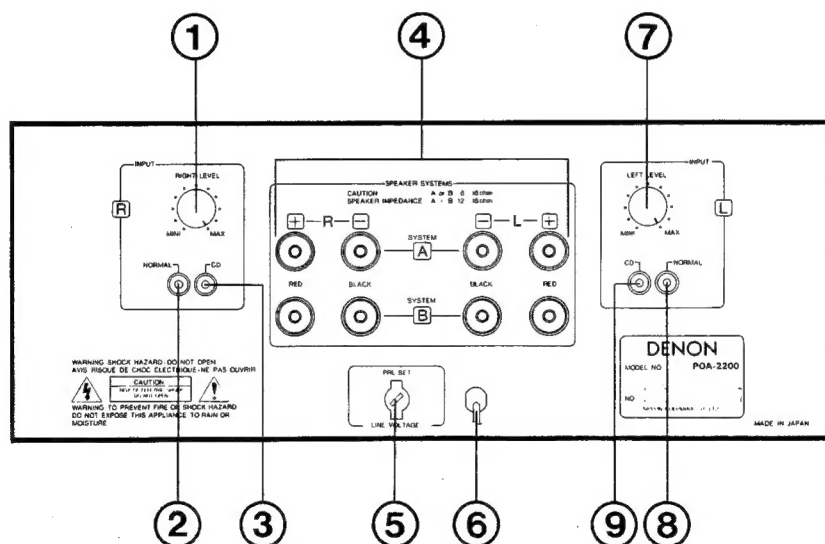


Fig. 2

- | | |
|--|---|
| ① RIGHT LEVEL (Rch. Input Level Control) | ⑥ AC CORD (Power Cord) |
| ② NORMAL (Rch. Normal Input Jack) | ⑦ LEFT LEVEL (Lch. Input Level Control) |
| ③ CD (Rch. CD Input Jack) | ⑧ NORMAL (Lch. Normal Input Jack) |
| ④ SPEAKER SYSTEMS (Speaker Terminals) | ⑨ CD (Lch. CD Input Jack) |
| ⑤ LINE VOLTAGE (Line Voltage Selector) | |

• LINE VOLTAGE (Voltage select switch) ... For Multiple voltage model only.

- * The desired voltage may be set with the VOLTAGE SELECTOR KNOB on the back panel using a screw driver.
- * Do not twist the VOLTAGE SELECTOR KNOB with excessive force. It may be damaged.
- * If the voltage select switch does not turn smoothly, see a qualified serviceman.

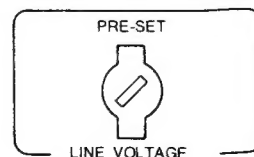

CONNECTIONS

• Connection to the speaker system

Connect the speaker system for the left channel (the left side as viewed facing the front) to the L speaker terminal on the back panel, and the speaker system for the right channel into the R terminal. There are two sets of SPEAKERS terminals. If only one speaker system is to be used, connect it to the SYSTEM A terminals.

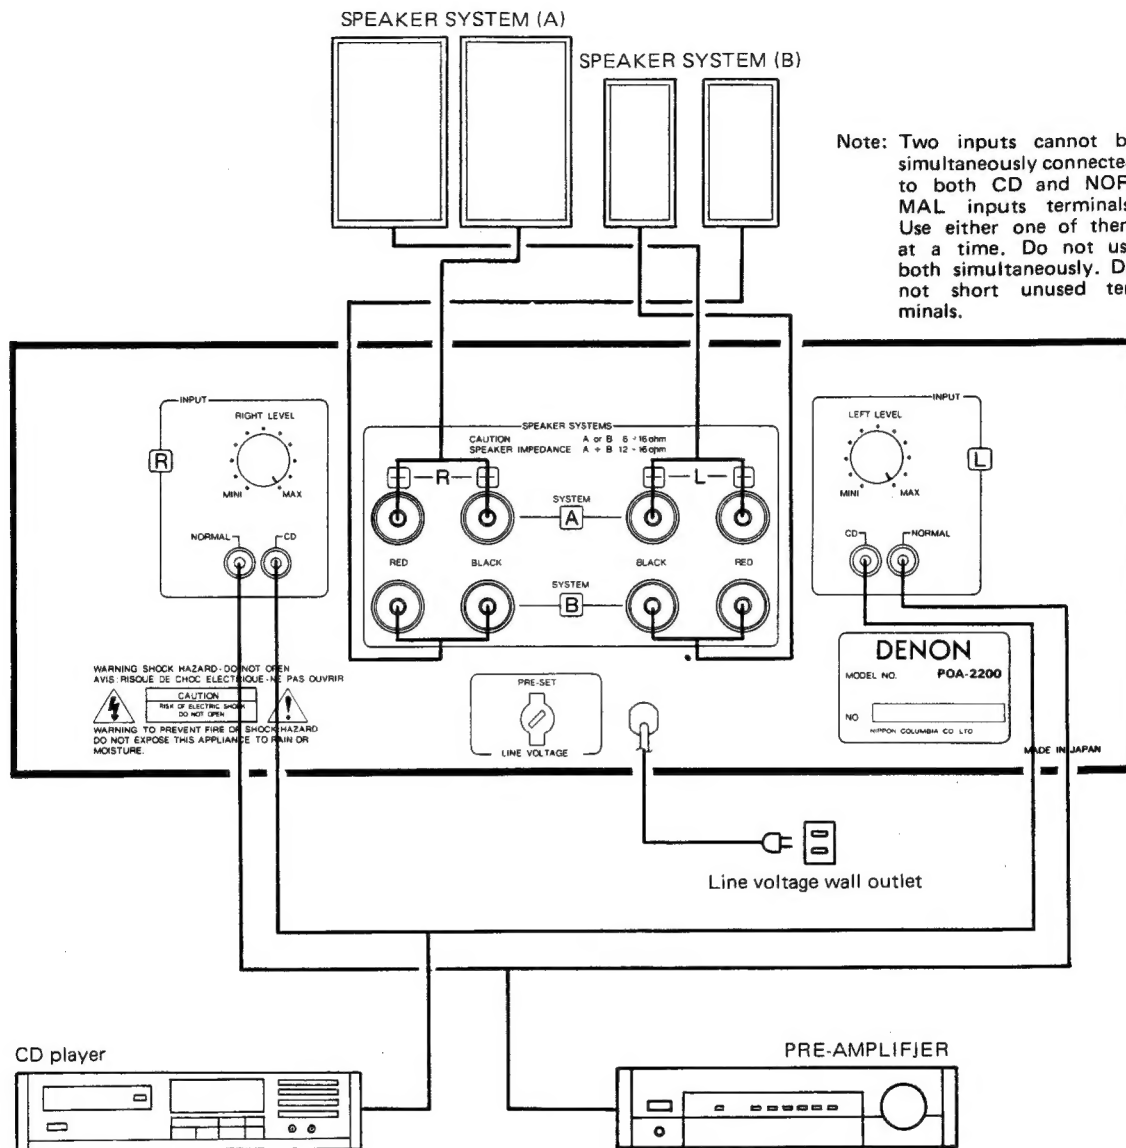


Fig. 3

CONNECTION PRECAUTIONS

- When making connections, make sure that the power is turned OFF.
- Make sure that the L output terminal of the preamplifier (or other audio equipment) is connected to the L input terminal of the POA-2200. Also check that the R output terminal of the preamplifier (or other audio equipment) is connected to the R input terminal of the POA-2200. Connect the cords going to the left speakers to the L terminals of the POA-2200 and the right speaker cords to the R terminals of the POA-2200.
- Make secure connections. If connections are not secure, noise or loss of sound output may occur.
- Do not bundle pin plug cords with the power cords: Please keep pin plug cords away from power supply transformers since hum or noise may occur.

REMOVAL OF EACH SECTION

1. Top Cover

Remove 8 screws from the both sides, 4 screws from the rear side and detach the Top Cover in the direction arrow shows.

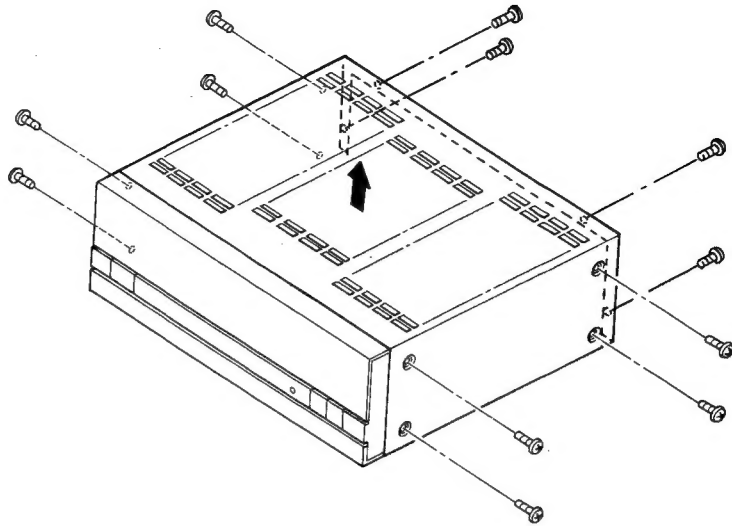


Fig. 4

2. Back Panel

Remove 8 screws from the bottom, 6 screws from the rear side, and take out the Back Panel in the direction arrow shows.

NOTE:

When remove Bottom Cover, do not take out the yellow screws.

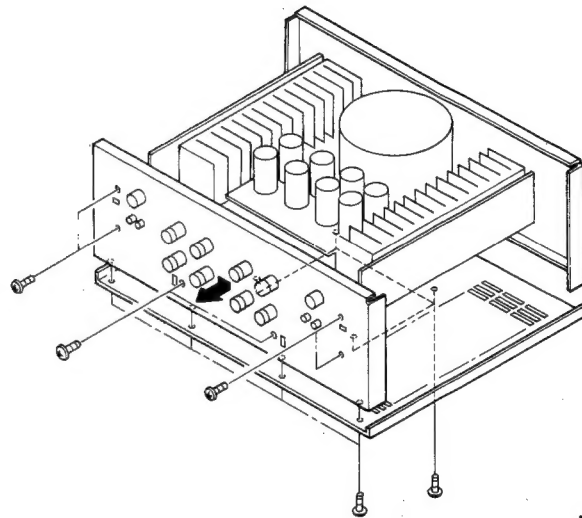


Fig. 5

3. Front Panel

Unfasten 4 screws from the bottom, 3 screws from the top, and dismantle the Front Panel.

Caution:

As illustration shows, please put a block underneath the unit and detach the Panel in a straight line to the unit. Never slant the panel nor to detach it with leaned line, this will prevent breaking of the power switch inside.

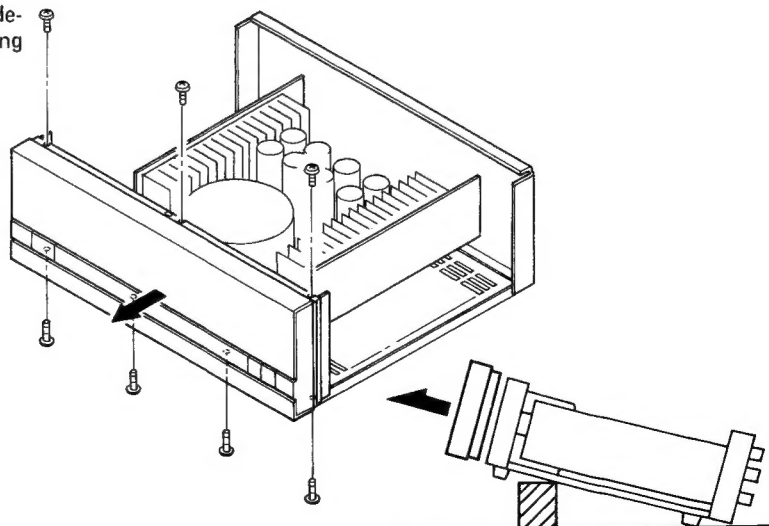


Fig. 6

METHOD OF ADJUSTMENTS

1. Adjustment of Idle Current (ETC-9070)

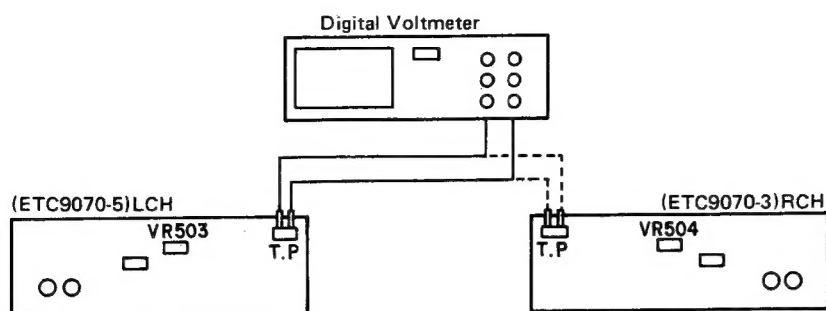


Fig. 7

- (1) Connect a digital voltmeter to the test point.
- (2) Turn the unit power on.
- (3) Wait 2~3 minutes for warm-up, rotate VR503: Lch (VR504: Rch) and adjust voltage value on the meter to $8\text{ mV} \pm 1\text{ mV}$.

2. Adjustment of Neutral Point Voltage

- (1) Connect a digital voltmeter to the SPEAKER terminal.
- (2) Turn the unit power on.
- (3) Turn the LEFT LEVEL and RIGHT LEVEL controls on the back panel fully clockwise (maximum).
- (4) Confirm the voltage on the meter indicates within $\pm 100\text{ mV}$ value.

3. Adjustment of Distortion Factor (ETC9070)

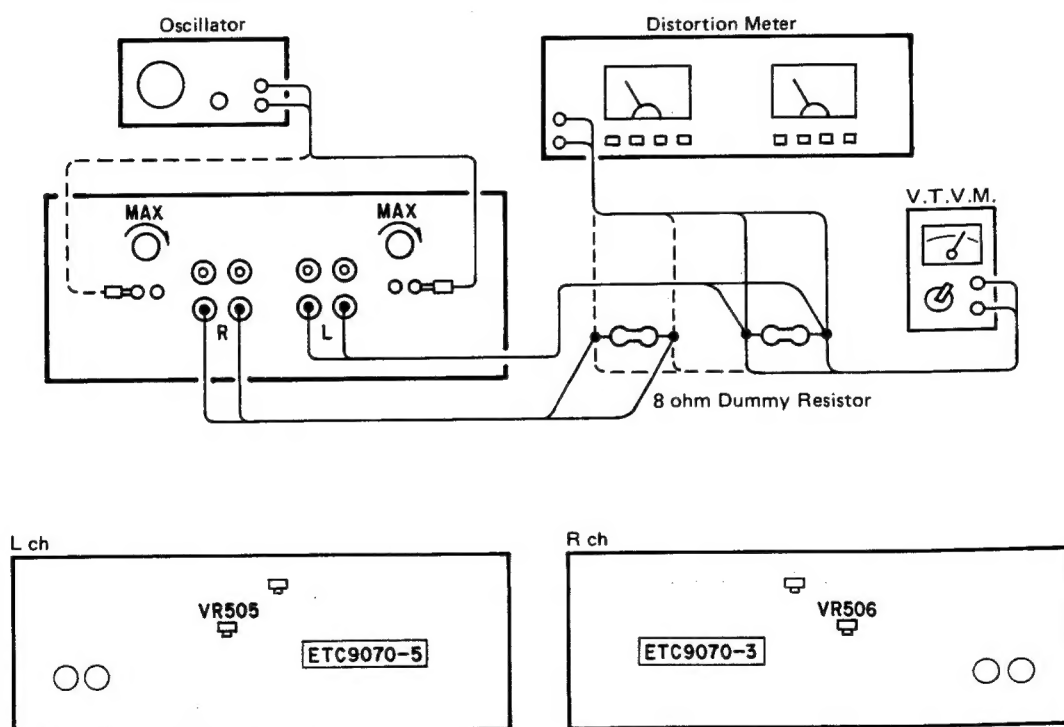


Fig. 8



- (1) Set an oscillator output to "NORMAL" and feed it to both channels simultaneously.

Each speaker output to connect — 8 ohm dummy resistor
 — Distortion meter
 — V.T.V.M.

- (2) Turn the unit power on, and set the LEFT LEVEL and RIGHT LEVEL controls to maximum.
- (3) In the first place confirm that there's no dropping of supply voltage, then set the oscillator frequency to 20 kHz and adjust output of oscillator to obtain 28.3V for both speaker outputs.
- (4) Adjust VR505: Lch (VR506: Rch) on the ETC9070 for minimum distortion. Distortion factor must be no more than 0.005% at this time.

ALIGNMENT POINTS
ETC9070 POWER UNIT (Component Side)

ETC9070 POWER

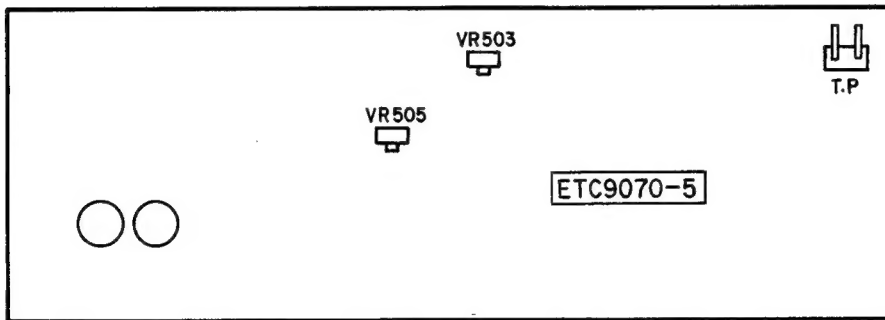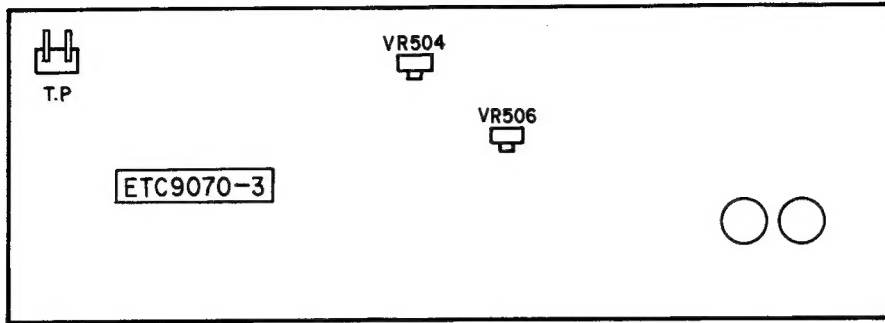

TROUBLESHOOTING


Before troubleshooting, be sure to check whether your audio system is really the source of the problem.

If you think the amplifier is out of order, first check the following one more time:

1. Are all the connections correctly made?
2. Is the set being operated properly in accordance with the Operating Manual?
3. Are the speakers and preamplifier being operated correctly?

If the set does not operate properly, perform the checks indicated in the flow chart below.

If none of the items listed apply to the difficulty, the amplifier is probably out of order. Turn off the power immediately, and contact the outlet where you purchased the amplifier or your nearest DENON dealer.

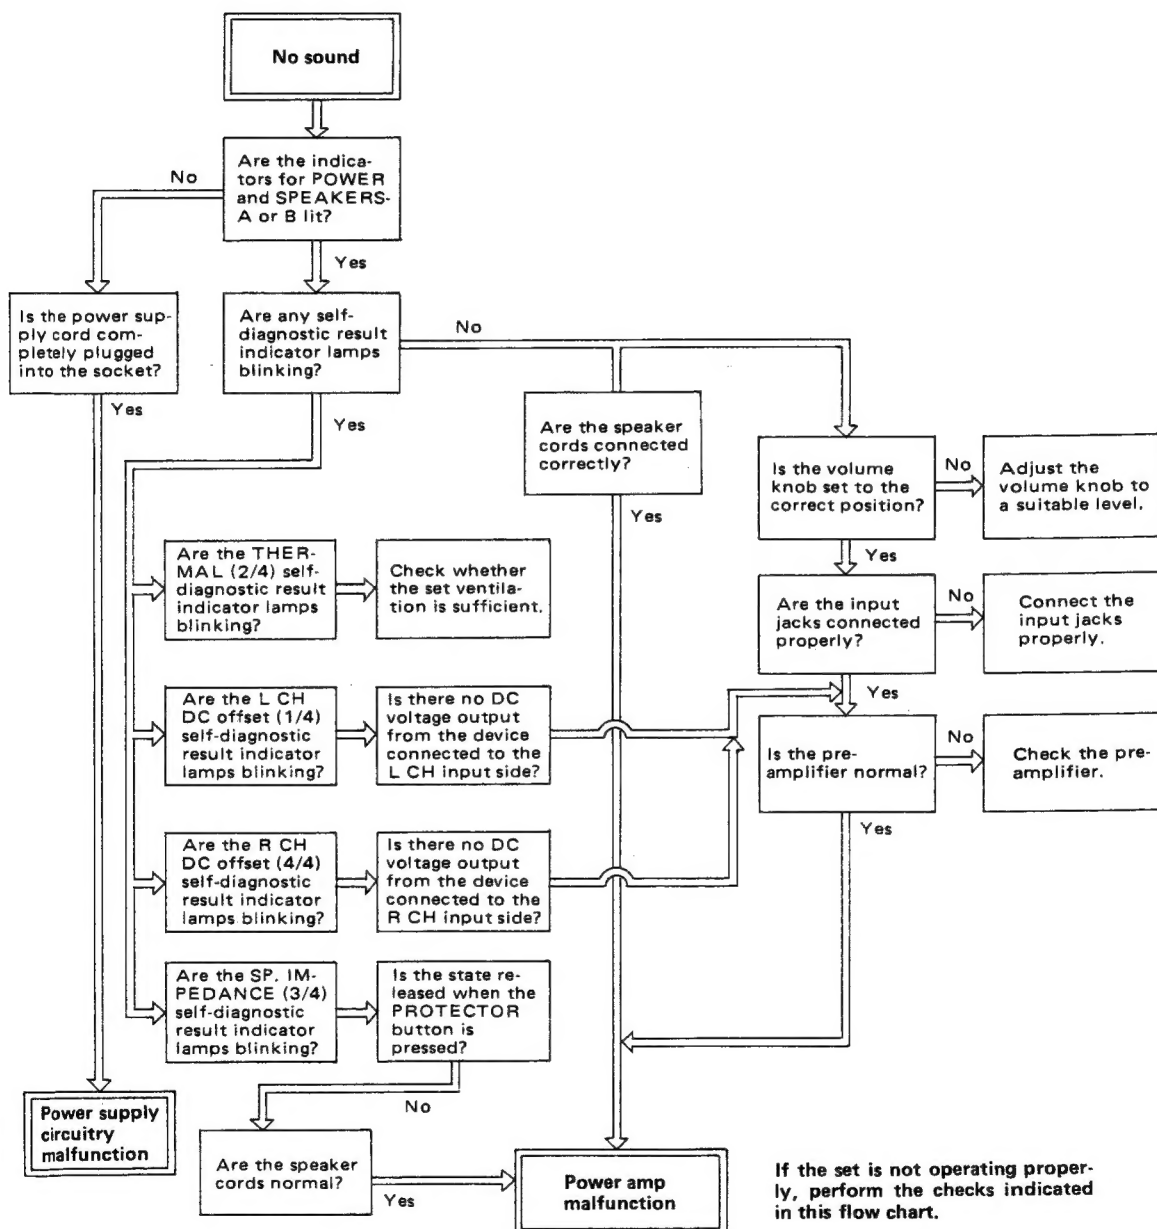

BLOCK DIAGRAM


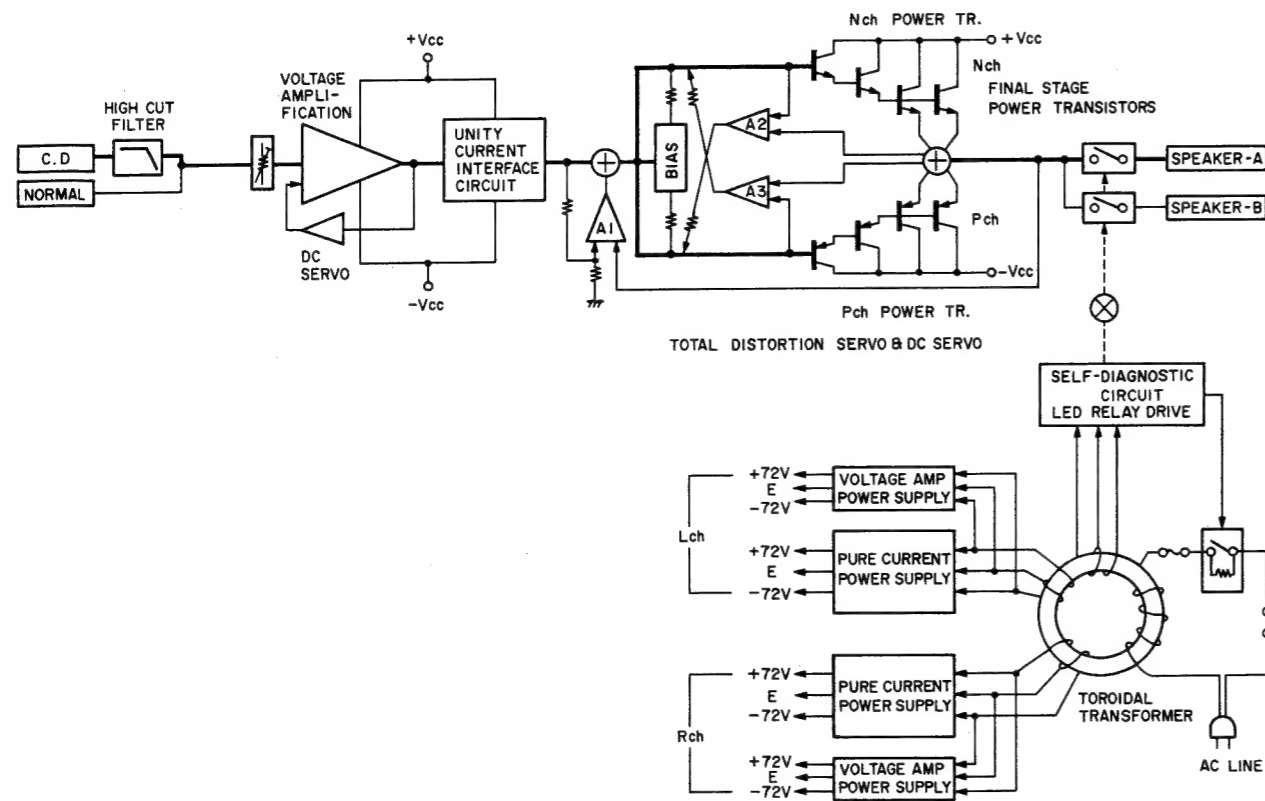


Fig. 9



SEMICONDUCTORS

• IC's


M5218P (Mitsubishi)




HD14001BP (Hitachi)



NJM082DT or 082BD (JRC)




NJM78M15A(JRC)




PIN CONFIGURATION
1. Output
2. Ground
3. Input

• TRANSISTOR (including FET)


2SA1015(Y)
2SC1815(BL)
2SC2878(A/B)




2SA1145(O/Y)
2SA1321
2SC2705(O/Y)
2SC3334




2SA968(Y)/(O)
2SC2238(Y)/(O)




2SA1306 O/Y
2SC3298 O/Y



2SA1360 (O/Y)
2SC3423 (O/Y)



FET
2SK184C(Y/GR/BL)



• DIODES (include LED's, Thyristor, Posistor)

HZ2C-1
HZ5C-1
HZ7B-3
HZ9B-2
HZ15-2




1S2076A




1SS133



4D4B42(LCI)




SF0R1A42
Thyristor




DSA1A2 {Type-2
Type-3
Color of Cathode Band, White


Type-2
Type-3

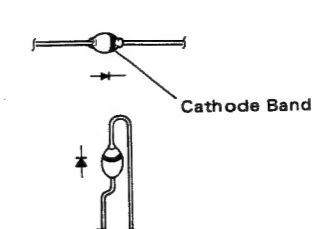


MV-1YH
Indication of cathode, White

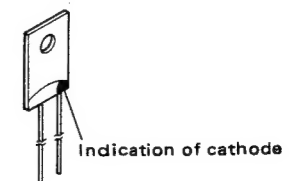

PTH487A01BD222TS




LD-701VR-L (RED)
LD-701YY(YELLOW)
LD-701DU(ORANGE)



LD-101DU (ORANGE)



PRINTED WIRING BOARD PATTERNS AND PARTS LIST

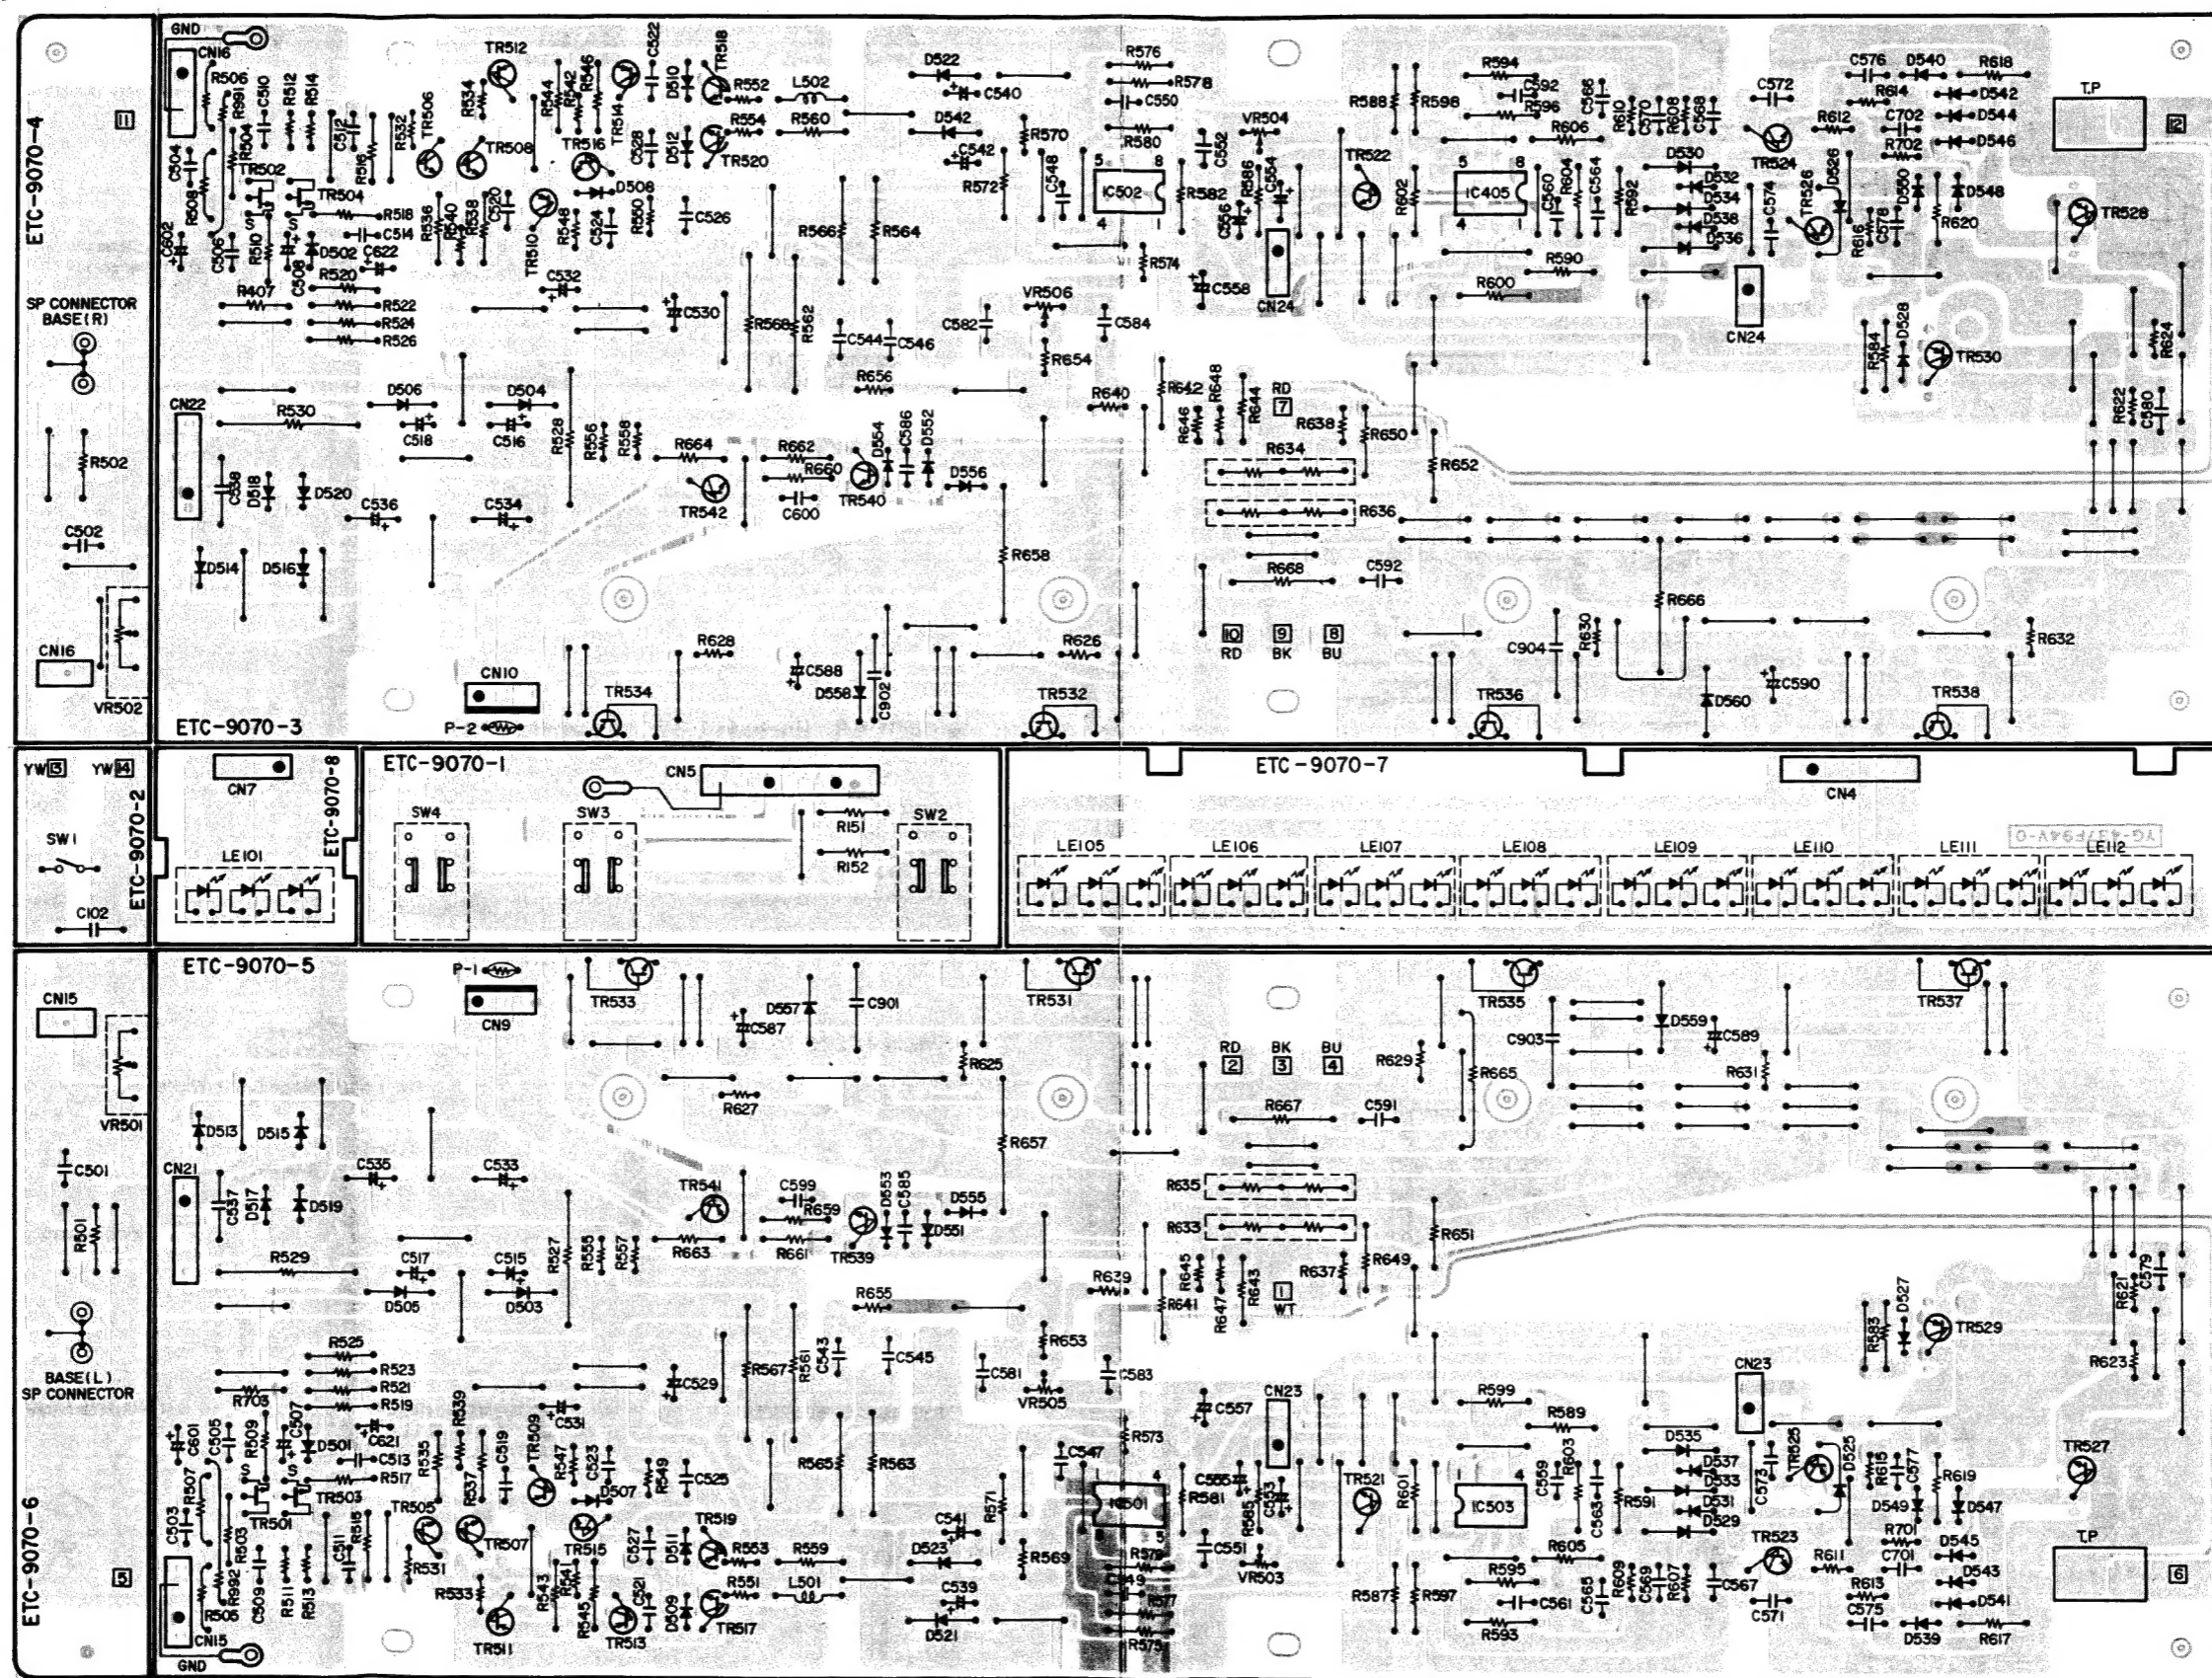

E2 for Europe ETC9070B [Same as ETC9070 (for EU) except the followings.]

Ref. No.	Part No.	Part Name & Descriptions
SWITCH		
	2129525008	Power Sw Change

Ref. No.	Part No.	Part Name & Descriptions
OTHER PARTS		
	4150298001	Condencer Cover Add

ETC9070 POWER UNIT PARTS LIST

Ref. No.	Part No.	Part Name & Descriptions			
SEMICONDUCTORS					
IC501,502	2630244014	NJM082DT	IC	(JRC)	
IC503,504	2630257001	M-5218P	IC	(Mitsubishi)	
TR501 ~504	2750055002	2SK184C(Y/GR/BL)	FET		
TR505 ~508	2730281003	2SC2705(O/Y)	Transistor		
TR509, 510	2710168007	2SA1145(O/Y)	Transistor		
TR511 ~514	2710202002	2SA1360(O/Y)	Transistor		
TR515, 516	2730333003	2SC3423(O/Y)	Transistor		
TR517, 518	2730324009	2SC3298O/Y	Transistor		
TR519, 520	2710196008	2SA1306O/Y	Transistor		
TR521, 522	2730198015	2SC1815(BL)	Transistor		
TR523, 524	2730332004	2SC3334	Transistor		
TR525, 526	2710201003	2SA1321	Transistor		
TR527, 528	2730199027	2SC2238(Y)/(O)	Transistor		
TR529, 530	2710104029	2SA968(Y)/(O)	Transistor		
TR539, 540	2730332004	2SC3334	Transistor		
TR541, 542	2710201003	2SA1321	Transistor		
D501,502	2760401002	1SS133	Diode		
D503~506	2760253001	HZ15-2	Zener		
D507~512	2760401002	1SS133	Diode		
D513~520	2760427015	DSA1A2 (TYPE-3)	Diode		
D521~524	2760253001	HZ15-2	Zener		
D525,526	2760049011	1S2076A	Diode		
D527,528	2760388002	MV-1YH	Diode		
D529,530	2760236031	HZ5C-1	Zener		
D531,532	2760401002	1SS133	Diode		
D533~536	2760254000	HZ7B-3	Zener		
D537~556	2960401002	1SS133	Diode		
LE101	3939319018	LD-701DU (Orange)	LED		
LE105 ~112	3939319034	LD-701VR-L (RED)	LED		
P001,002	2760289004	PTH487A01BD222TS	Positive Thermistor		
RESISTORS (not included Carbon Film $\pm 5\%$, 1/4W type)					
Δ R511~514	2412380963	2.2k ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R527~530	2440106025	4.7k ohm	$\pm 5\%$	2W	Metal Oxide Film (NB)
Δ R531~534	2412378904	180 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R539,540	2412379961	820 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R541,542	2412377934	91 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R547~550	2412377947	100 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R551~554	2412375981	22 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R555~558	2412387908	1 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R561,562	2440101020	1.8k ohm	$\pm 5\%$	2W	Metal Oxide Film (NB)
Δ R563~566	2440043023	1.5k ohm	$\pm 5\%$	1W	Metal Oxide Film (NB)
Δ R567,568	2440101020	1.8k ohm	$\pm 5\%$	2W	Metal Oxide Film (NB)
Δ R569,570	2412377947	100 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R573,574	2412379987	1k ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R607~610	2412379987	1k ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R611,612	2412379903	470 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R613~616	2412377947	100 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R621,622	2412387908	1 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R623,624	2412377947	100 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R625~628	2412387908	1 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R629~632	2412322028	4.7 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R633~636	2432033038	0.18 ohm x 2	$\pm 5\%$	2W	Wire Wound
Δ R637~640	2412375981	22 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R645~648	2412379987	1k ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R653~656	2412376964	47 ohm	$\pm 5\%$	1/4W	Carbon (NB)
Δ R657,658	2440106025	4.7k ohm	$\pm 5\%$	2W	Metal Oxide Film (NB)

Ref. No.	Part No.	Part Name & Descriptions			
Δ R665,666	2440112022	15k ohm	$\pm 5\%$	2W	Metal Oxide Film (NB)
Δ R667,668	2440021029	22 ohm	$\pm 5\%$	1W	Metal Oxide Film (NB)
VR501, 502	2119031007	Input VR	50k ohm		
VR503, 504	2116014072	Semi Fixed Resistor Bias	(10k ohm)		
VR505, 506	2116014069	Semi Fixed Resistor	20kHz T.H.D. (200 ohm)		
CAPACITORS					
Δ C102	2538003014	4700pF	$\pm 20\%$	400VAC	(Power SW) Ceramic
C501,502	2554131009	270pF	$\pm 5\%$	50V	Plastic Film
C503,504	2554129008	220pF	$\pm 5\%$	50V	Plastic Film
C505,506	2554137003	470pF	$\pm 5\%$	50V	Plastic Film
C507,508	2544150003	10μF		50V	Electrolytic
C509,510	2554141002	680pF	$\pm 5\%$	50V	Plastic Film
C511,512	2551120084	4700pF	$\pm 5\%$	50V	Plastic Film
C513,514	2534262008	3pF	$\pm 0.25pF$	500V	Ceramic
C515~518	2544150003	10μF		50V	Electrolytic
C519,520	2534269001	10pF	$\pm 0.5pF$	500V	Ceramic
C521,522	2534355009	5pF	$\pm 0.25pF$	500V	Ceramic
C523,524	2554121006	100pF	$\pm 5\%$	50V	Plastic Film
C525,526	2554137003	470pF	$\pm 5\%$	50V	Plastic Film
C527,528	2531024003	0.01μF	$\pm 80,-20\%$	50V	Ceramic
C529~532	2544181001	1μF	$\pm 20\%$	100V	Electrolytic
C533~536	2544229002	470μF	$\pm 20\%$	100V	Electrolytic
C537,538	2531052004	4700pF	$\pm 100,-0\%$	500V	Ceramic
C539~542	2544164031	220μF	$\pm 20\%$	25V	Electrolytic
C543~546	2551135095	0.056μF	$\pm 5\%$	50V	Plastic Film
C547,548	2534269001	10pF	$\pm 0.5pF$	500V	Ceramic
C549~552	2554121006	100pF	$\pm 5\%$	50V	Plastic Film
C553,554	2544132005	10μF		16V	Electrolytic
C555~558	2544181001	1μF	$\pm 20\%$	100V	Electrolytic
C559~566	2551134025	0.01μF	$\pm 5\%$	50V	Plastic Film
C567~570	2554121006	100pF	$\pm 5\%$	50V	Plastic Film
C571~574	2534281005	33pF	$\pm 5\%$	500V	Ceramic
C575~578	2551120026	1500pF	$\pm 5\%$	50V	Plastic Film
C579,580	2551134054	0.1μF	$\pm 5\%$	50V	Plastic Film
C581~584	2551134025	0.01μF	$\pm 5\%$	50V	Plastic Film
C585,586	2551120084	4700pF	$\pm 5\%$	50V	Plastic Film
C587~590	2544181014	10μF	$\pm 20\%$	100V	Electrolytic
C591,592	2551121025	0.01μF	$\pm 5\%$	50V	Plastic Film
C599,600	2551072006	0.01μF	$\pm 10\%$	50V	Plastic Film
C601,602	2544132005	10μF		16V	Electrolytic
C621,622	2544150003	10μF		50V	Electrolytic
SWITCHES & COIL					
Δ L501,502	2129534002 2129536000 2350016917	Power SW (Push) 3P Push Switch Inductor (180K)			
OTHER PARTS					Q'ty
J901,902	2229070107	P.W. Board			1
	2090008120	Jumper Wire P=10mm			200
	2090008104	Jumper L=15mm			2
	EP-5667H1	Terminal Pin L=21mm			12
	4170043100	Radiator			4
	4730354019	Tapping Screw (2) 3x8			4
	2050315002	2P Connector Base			2
	2050075025	2P Terminal			2
	2050190036	3P NH Connector Base			2
	2050154030	3P NH Connector Base			2
	2050243022	2P Wire Holder			6
	2050243035	3P Wire Holder			2
	2050185038	3P Wire Holder			4
	2050243048	4P Wire Holder			2
	2050243051	5P Wire Holder			1
	2050243080	8P Wire Holder			1
	2034282012	3P Connector Cord			2
	2034185009	3P Connector Cord			1
	2036171008	4P Connector Cord			2
	2038162002	5P Connector Cord			1

(Con.)

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
	2042052027	7P Connector Cord	1
	2030241028	1P Contact Ass'y	2
	2030275007	1P Contact Ass'y	1
	4756008006	4φ Nut	2

ETC9071 SUPPLY UNIT PARTS LIST

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
SEMICONDUCTORS			
IC101	2680217004	NJM78M15A IC (JRC)	
IC102,103	2620298009	HD14001BP IC (Hitachi)	
TR101	2730253015	2SC2878(A/B) Transistor	
TR102	2730317003	2SC2458(BL) Transistor	
TR103	2710191003	2SA1048(GR) Transistor	
TR104	2730317003	2SC2458(BL) Transistor	
~107			
TR108	2710191003	2SA1048(GR) Transistor	
~111			
TR112,113	2730317003	2SC2458(BL) Transistor	
TR114	2710191003	2SA1048(GR) Transistor	
TR115,116	2730317003	2SC2458(BL) Transistor	
TR117	2710191003	2SA1048(GR) Transistor	
TR118	2730317003	2SC2458(BL) Transistor	
~122			
D101,102	2760424005	4D4B42(LC1) Diode	
D103~106	2760427002	DSA1A2 (TYPE-2) Diode	
D201,202	2760427015	DSA1A2 (TYPE-3) Diode	
D203,204	2760049011	1S2076A Diode	
D205	2760401002	1SS133 Diode	
D206	2760236031	HZ5C-1 Zener	
D207,208	2760401002	1SS133 Diode	
D210~212	2760401002	1SS133 Diode	
D213	2760254000	HZ7B-3 Zener	
D213	2760218033	HZ9B-2 Zener	
D214~217	2760401002	1SS133 Diode	
D218	2790016001	SF0R1A42 Diode	
D219~226	2760401002	1SS133 Diode	
D227	2760049011	1S2076A Diode	
D228	2760254000	HZ7B-3 Zener	
D229,230	2760401002	1SS133 Diode	
D231	2760368019	HZ2C-1 Zener	
D250	2760401002	1SS133 Diode	
D801,802	2760401002	1SS133 Diode	
LE102,103	3939223010	LD-101DU (Orange) LED	
LE104	3939319021	LD-701YY (Yellow) LED	
RESISTORS (not included Carbon Film ±5%, 1/4W type)			
R101	2432044001	1.2 ohm ±10% 10W Wire Wound	
R163,164	2430032002	0.47 ohm ±10% 3W Wire Wound	
R192	2412387908	1 ohm ±5% 1/4W Carbon (NB)	
R805,806	2440025025	47 ohm ±5% 1W Metal Oxide Film (NB)	
CAPACITORS			
C101	2538003014	4700pF ±20% 400VAC Ceramic	
C103,104	2531151002	4700pF +100,0% 500V Ceramic	
C201	2551134025	0.01μF ±5% 50V Plastic Film	
C202	2544168095	1000μF ±20% 35V Electrolytic	
C203	2544145005	0.47μF 50V Electrolytic	
C204	2544146004	1μF 50V Electrolytic	
C205	2544127007	220μF 6.3V Electrolytic	
C206	2544254912	22μF ±20% 16V Electrolytic	
C207	2561035017	0.22μF ±5% 50V Metalized	
C208,209	2544130007	100μF 10V Electrolytic	
C210	2544132005	10μF 16V Electrolytic	
C251~253	2544164015	10μF ±20% 25V Electrolytic	
C801,802	2551121067	0.022μF ±5% 50V Plastic Film	

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
RELAYS & COILS			
RL001,002	2140041008	Relay (24V, 7A)	
RL003	2140038008	Relay (24V, 8A)	
L801~804	2359001004	Inductor (Power Out 1μH)	
OTHER PARTS			Q'ty
	2229071106	P.W. Board	1
	2090008120	Jumper Wire P=10mm	105
	EP-5667H1	Terminal Pin L=21mm	21
	4170253000	Radiator	1
	4700012022	Cross Pan Screw with S.W. W3x12	1
	2020022008	Fuse Holder	20
	EP-5870	Fuse Holder	2
F001	2061051009	Fuse 12A	1
F003,004	2061039047	Fuse 1.25A	2
F005~008	2061046014	Fuse 8A	4
F009~012	2061046027	Fuse 5A	4
	2050075025	2P Terminal	1
	2050154030	3P NH Connector Base	2
	2050190036	3P NH Connector Base	
	2050190049	4P NH Connector Base	3
	2050190052	5P NH Connector Base	3
	2050190078	7P NH Connector Base	1
	2050243048	4P Wire Holder	1
	2050243022	2P Wire Holder	2
	2036105058	4P Connector Cord	1

EP for PX(multi. voltage) ETC9071D

[Same as ETC9071 (for EU) except the followings.]







Ref. No.	Part No.	Part Name & Descriptions	Q'ty
OTHER PARTS			
F001	2020022008	Fuse Holder (22)	Add
F002	2061017043	Fuse 12A	Change
F003,004	2061035038	Fuse (6.3A)	Add
F005~008	2061035025	Fuse (1.25A) (2)	Change
F009~012	2061052008	Fuse 8A (4)	Change
	2061035012	Fuse 5A (T) (4)	Change

E2 for Europe ETC9071B


[Same as ETC9071 (for EU) except the followings.]

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
RESISTORS			
R101	2432044027	2.2 ohm ±10% 10W Wire Wound	Change
OTHER PARTS			
	4170197108	Heat Sink (2)	Add
	4700012006	Cross Pan Screw with S Washer 3x12 (ZNP) (2)	Add
F001	2020022008	Fuse Holder (22)	Change
F003,004	2061036011	Fuse (6.3A)	Change
F005~008	2061015016	Fuse (1.25A) (2)	Change
F009~012	2061036011	Fuse (6.3A)	Change
	2061015090	Fuse (5A) (4)	Change
	EP-5870	Fuse Holder (2)	Delete




ETC9071 SUPPLY UNIT

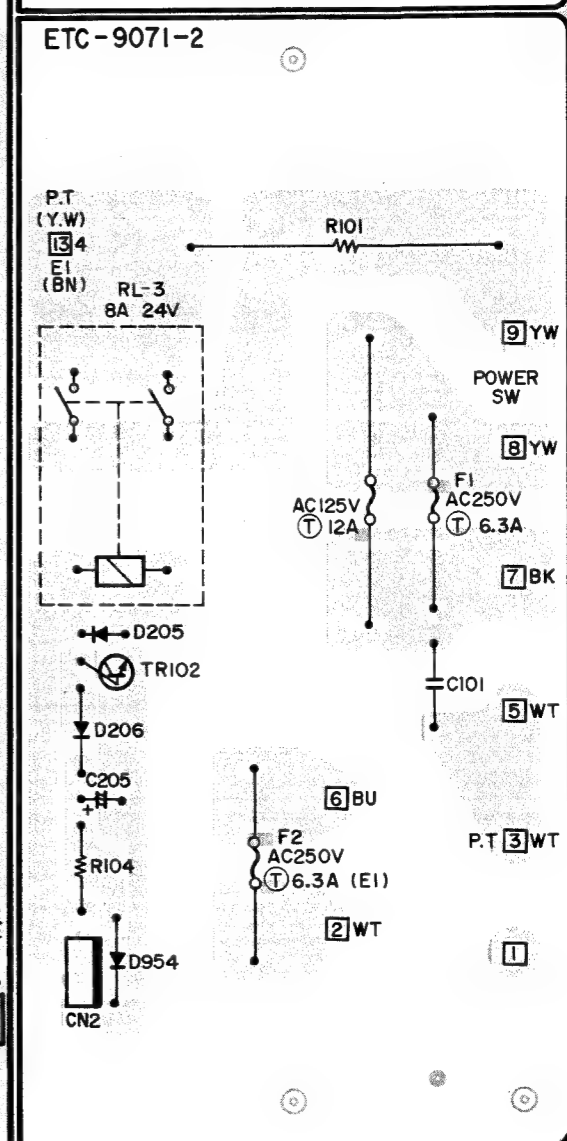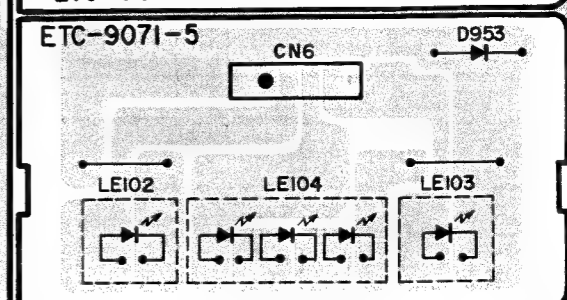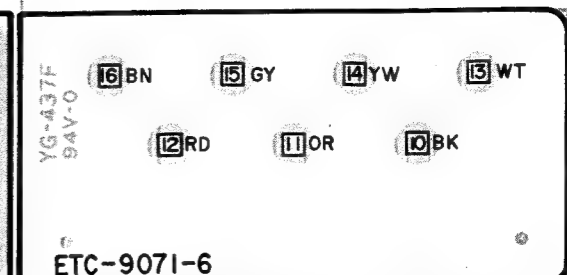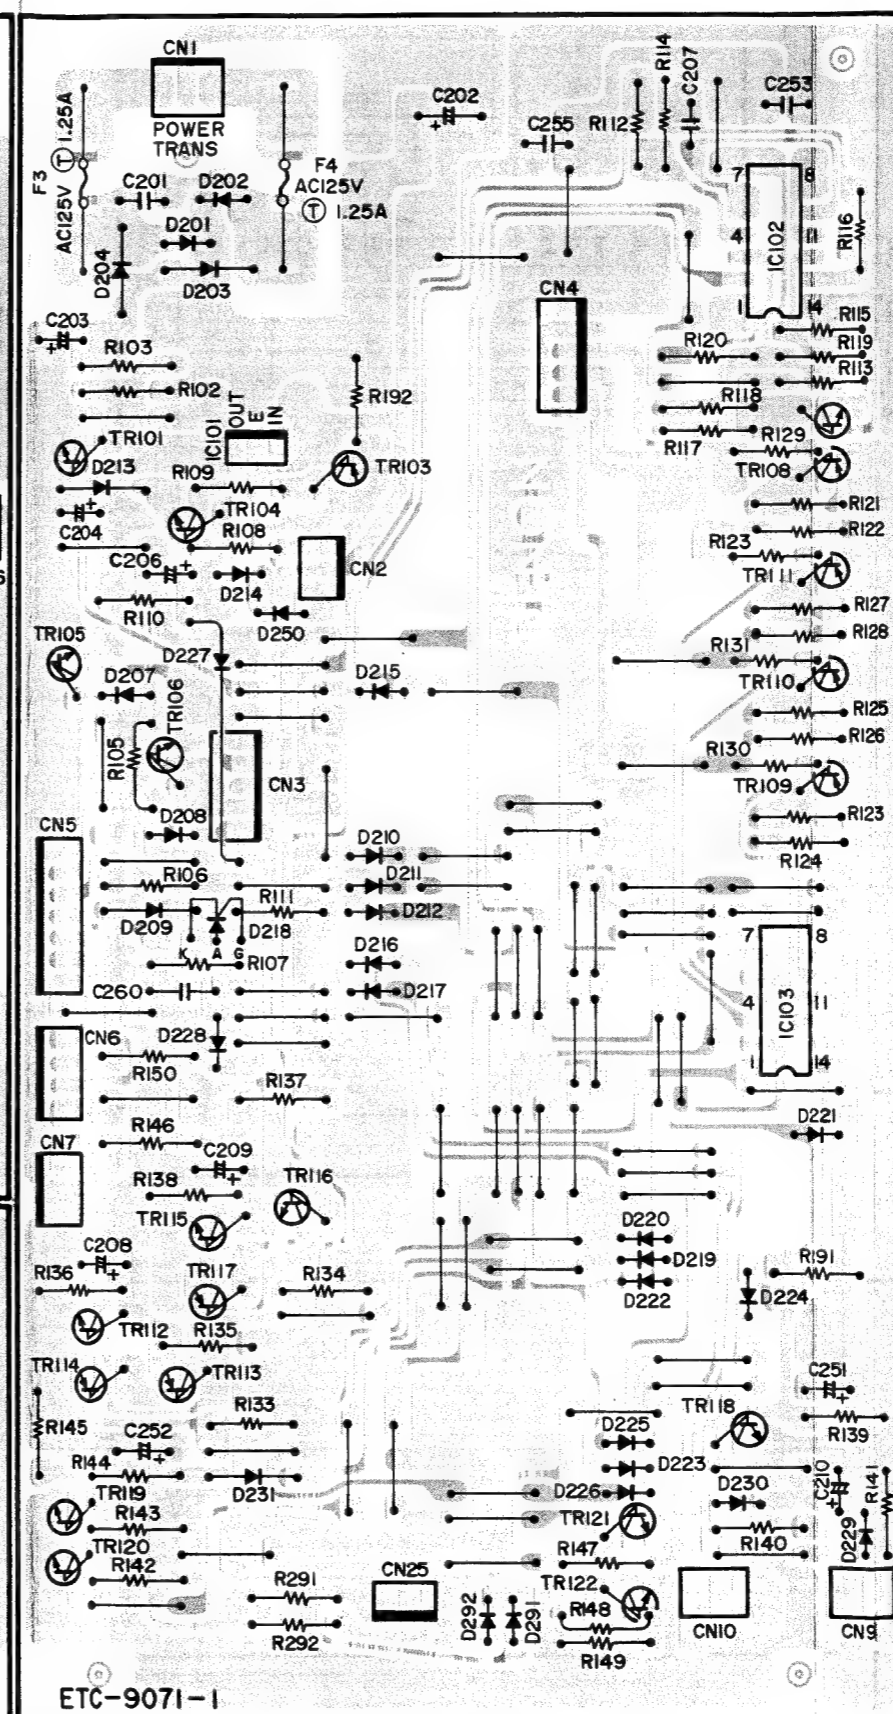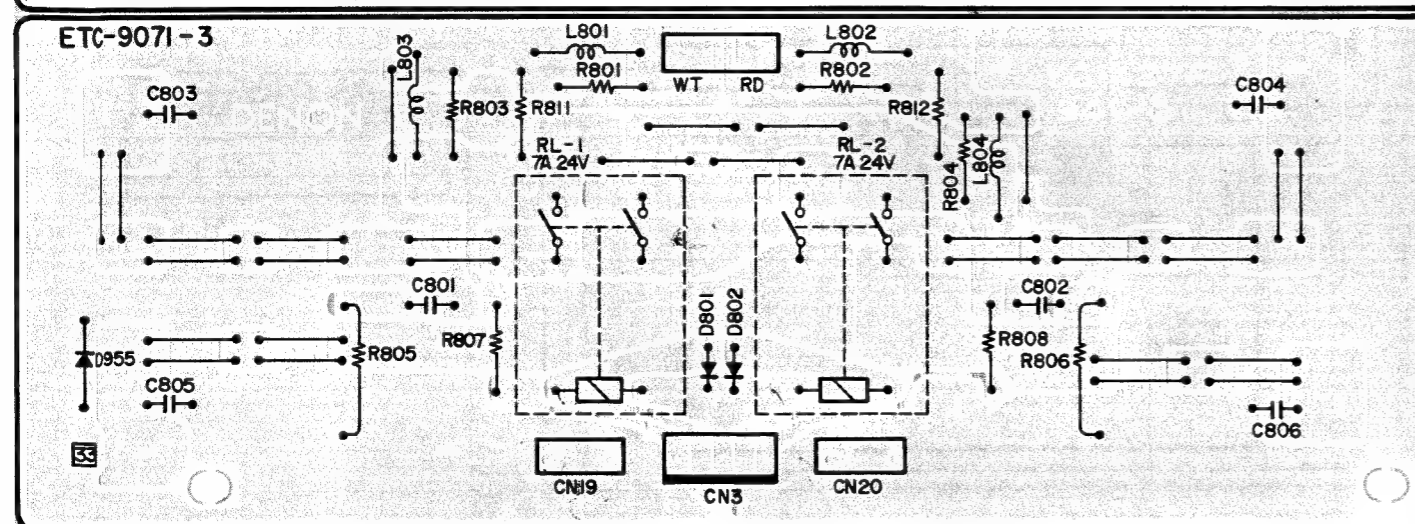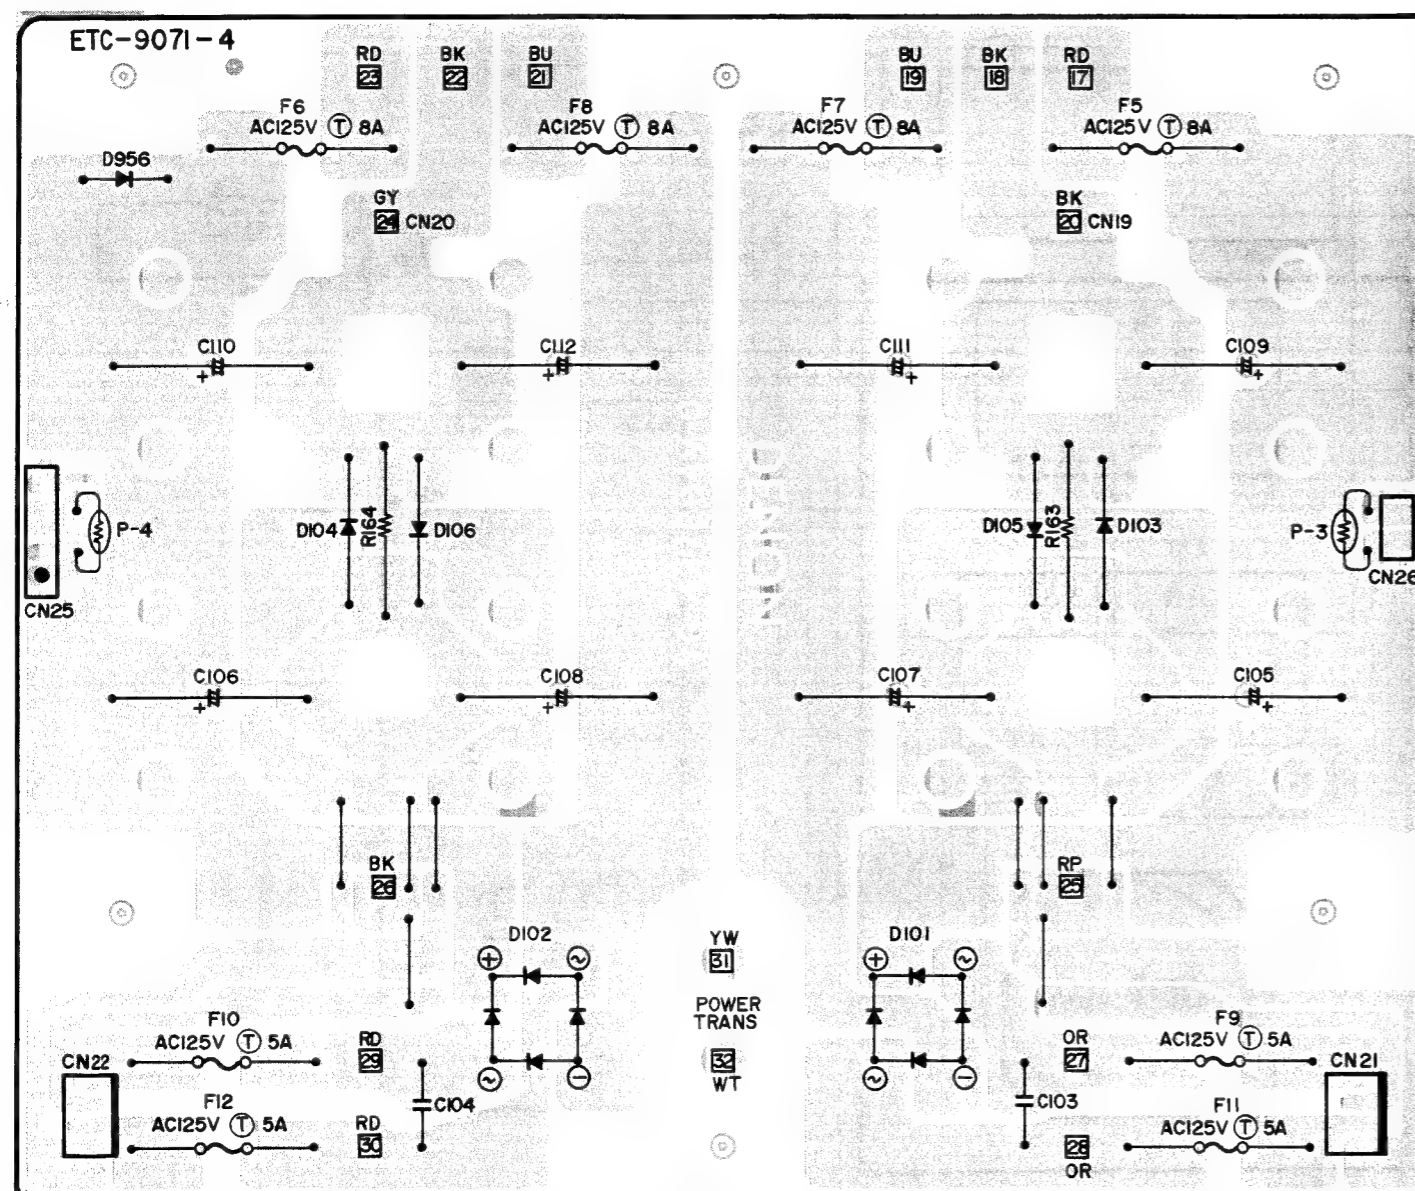

WIRING DIAGRAM

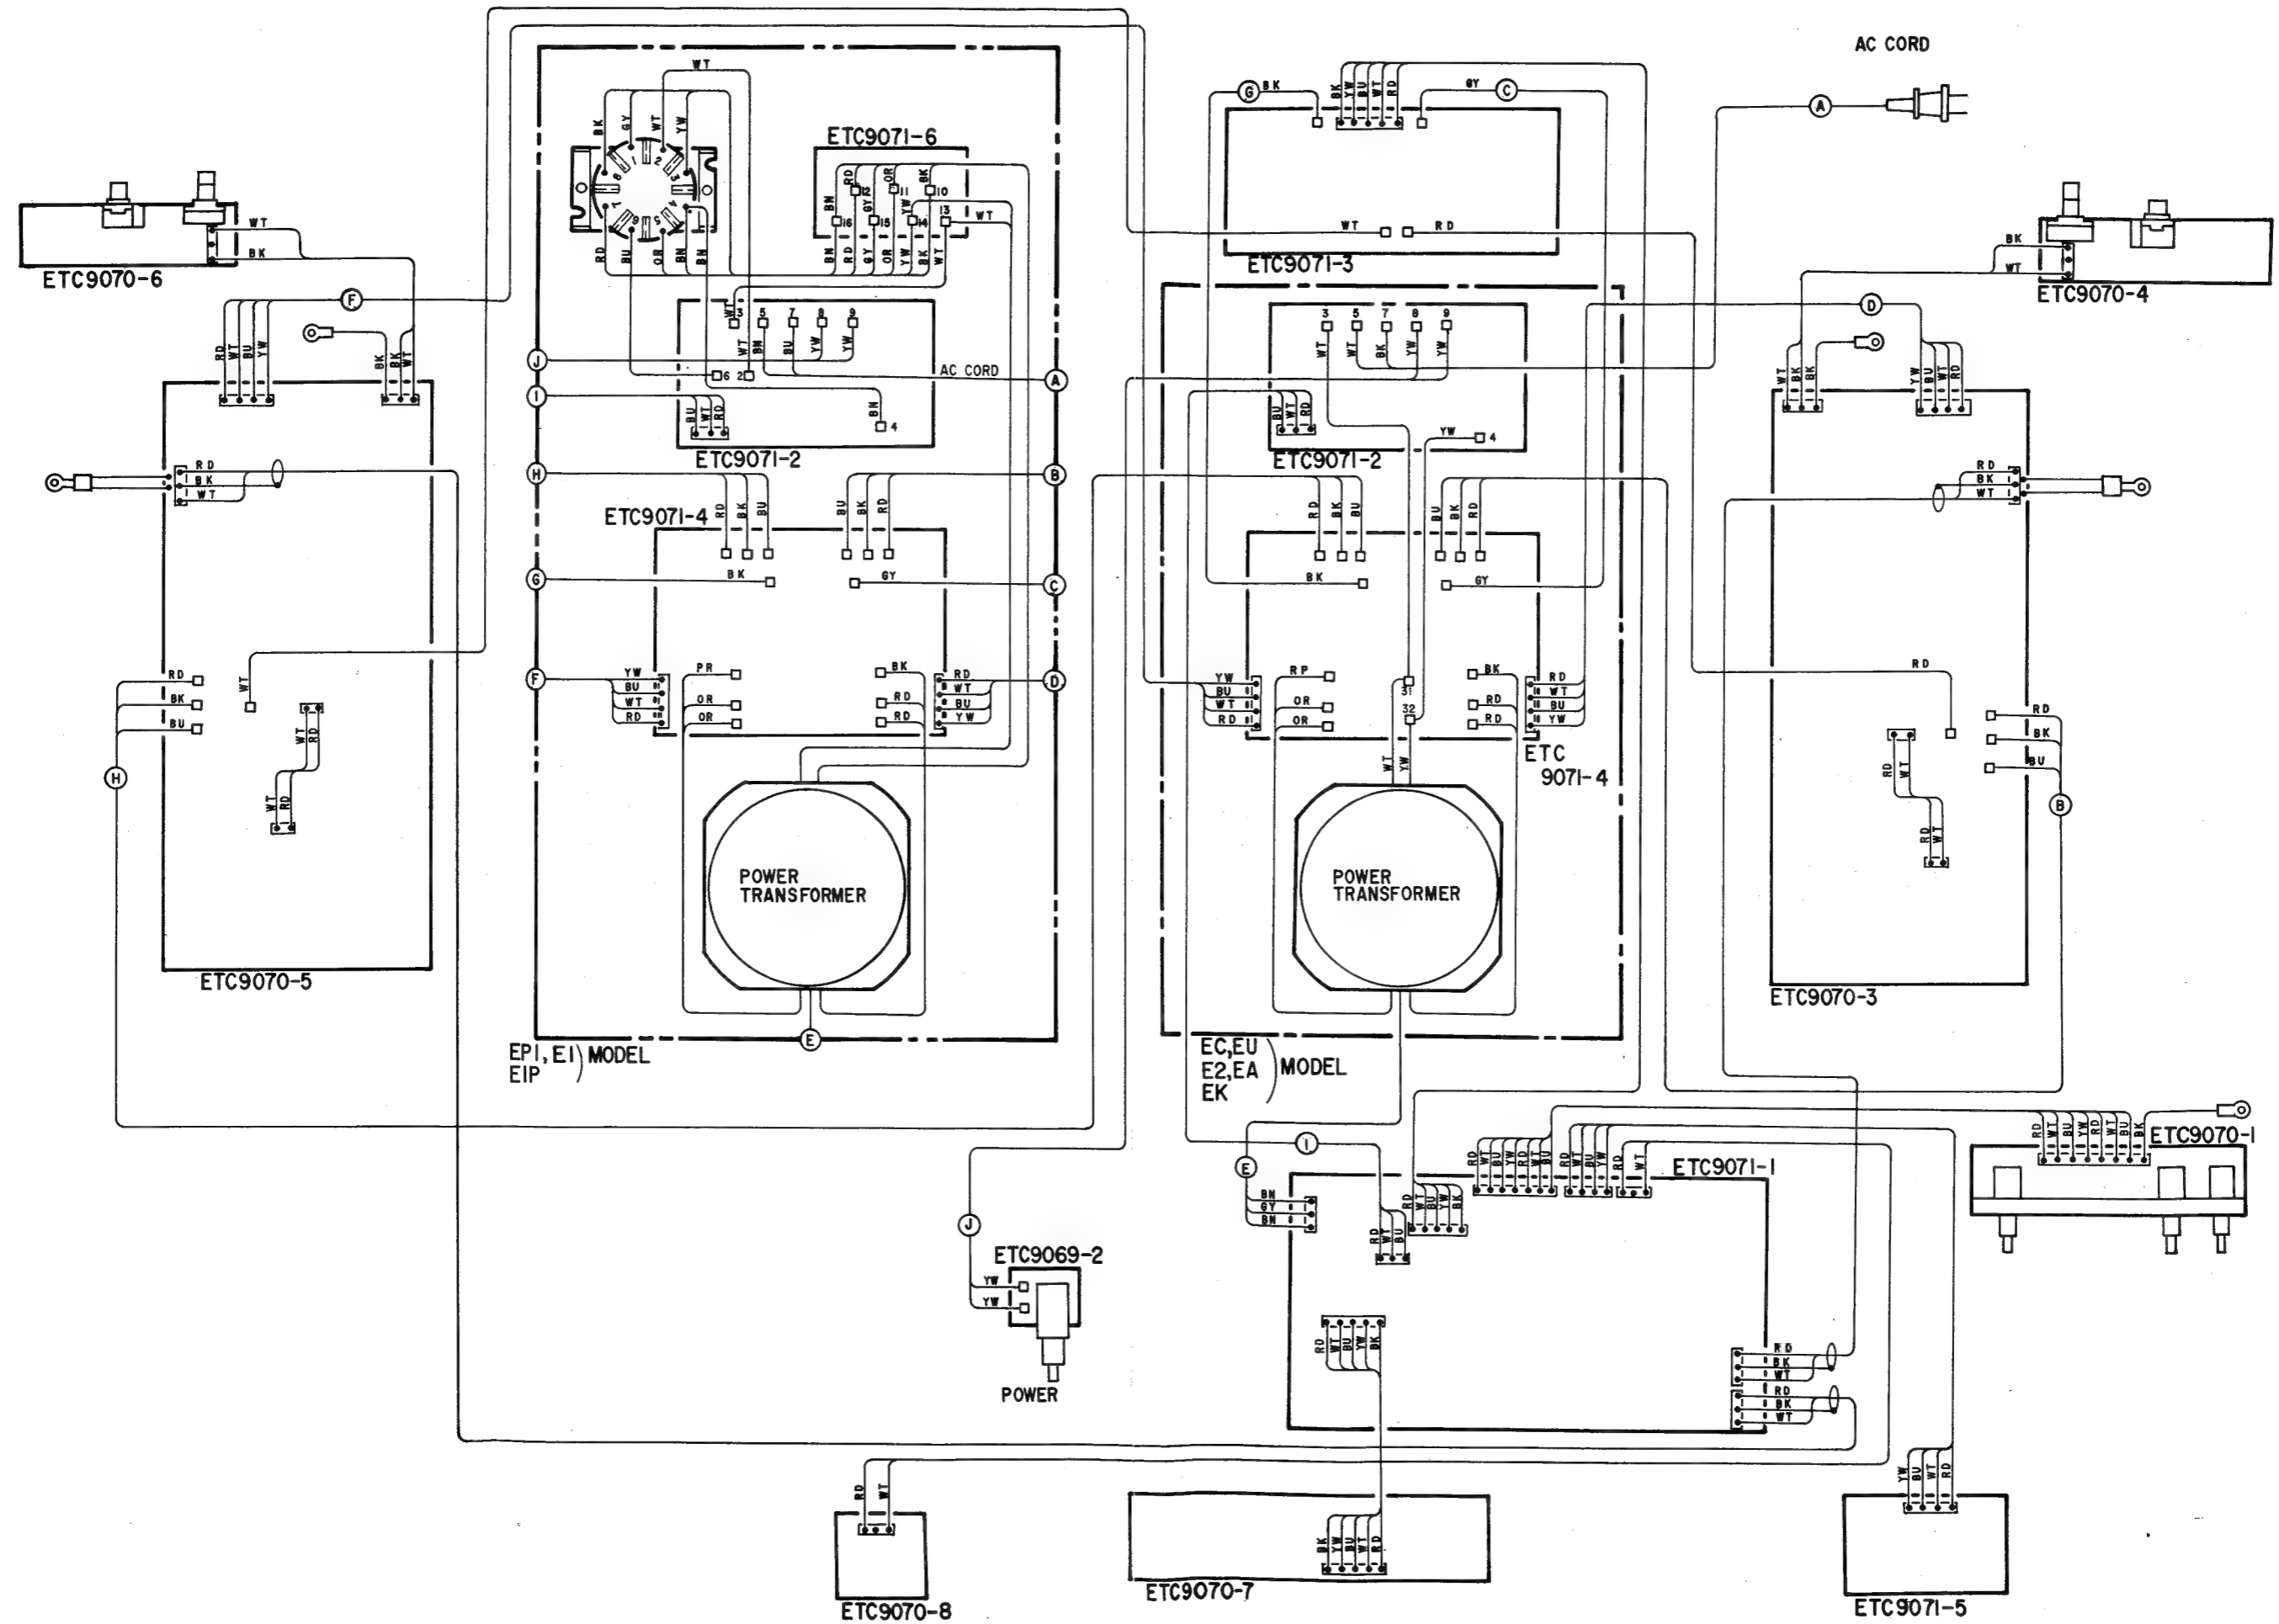

SCHEMATIC DIAGRAM

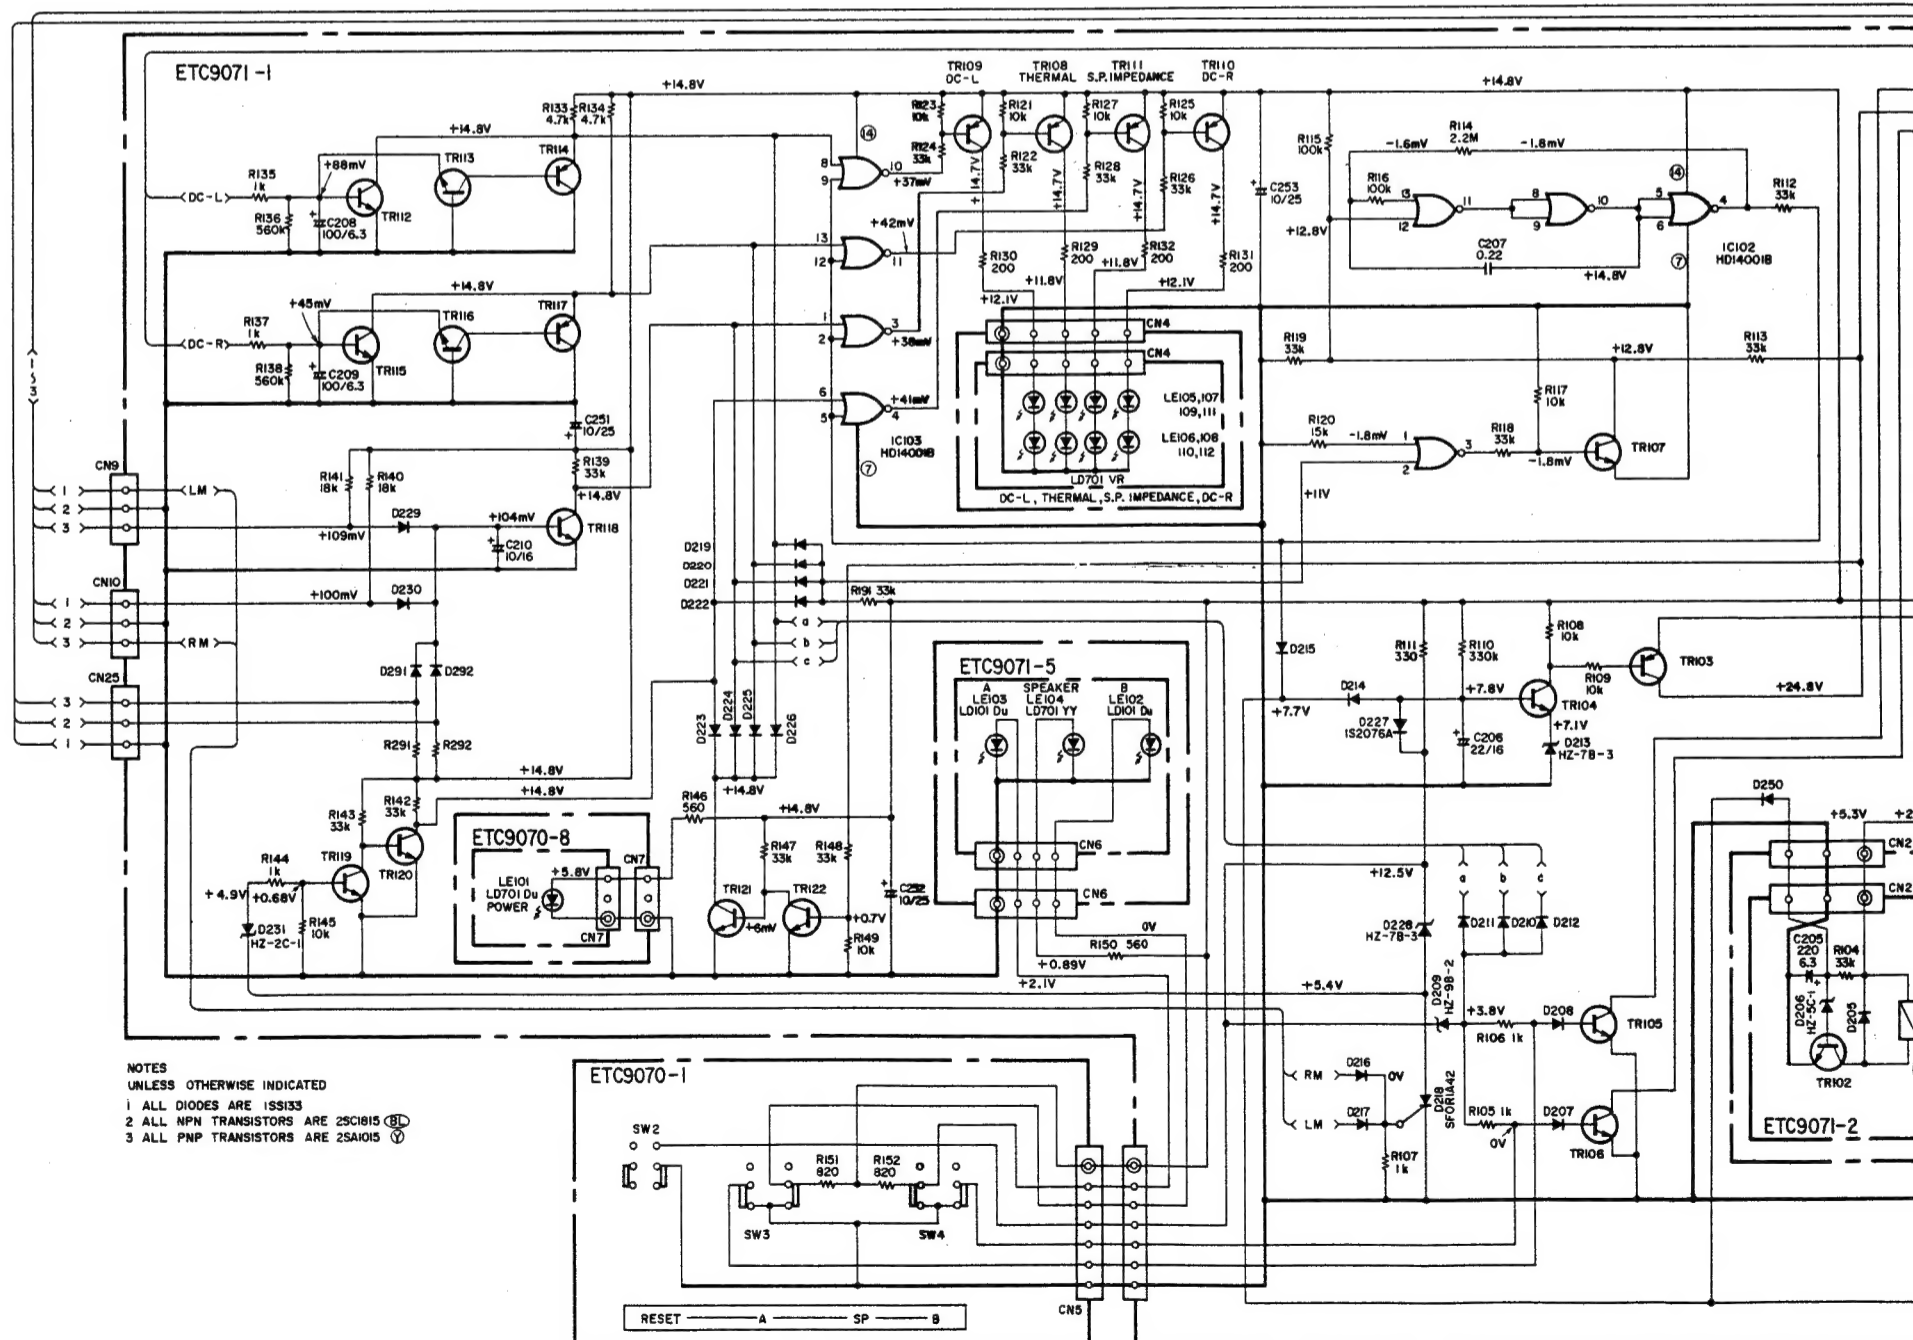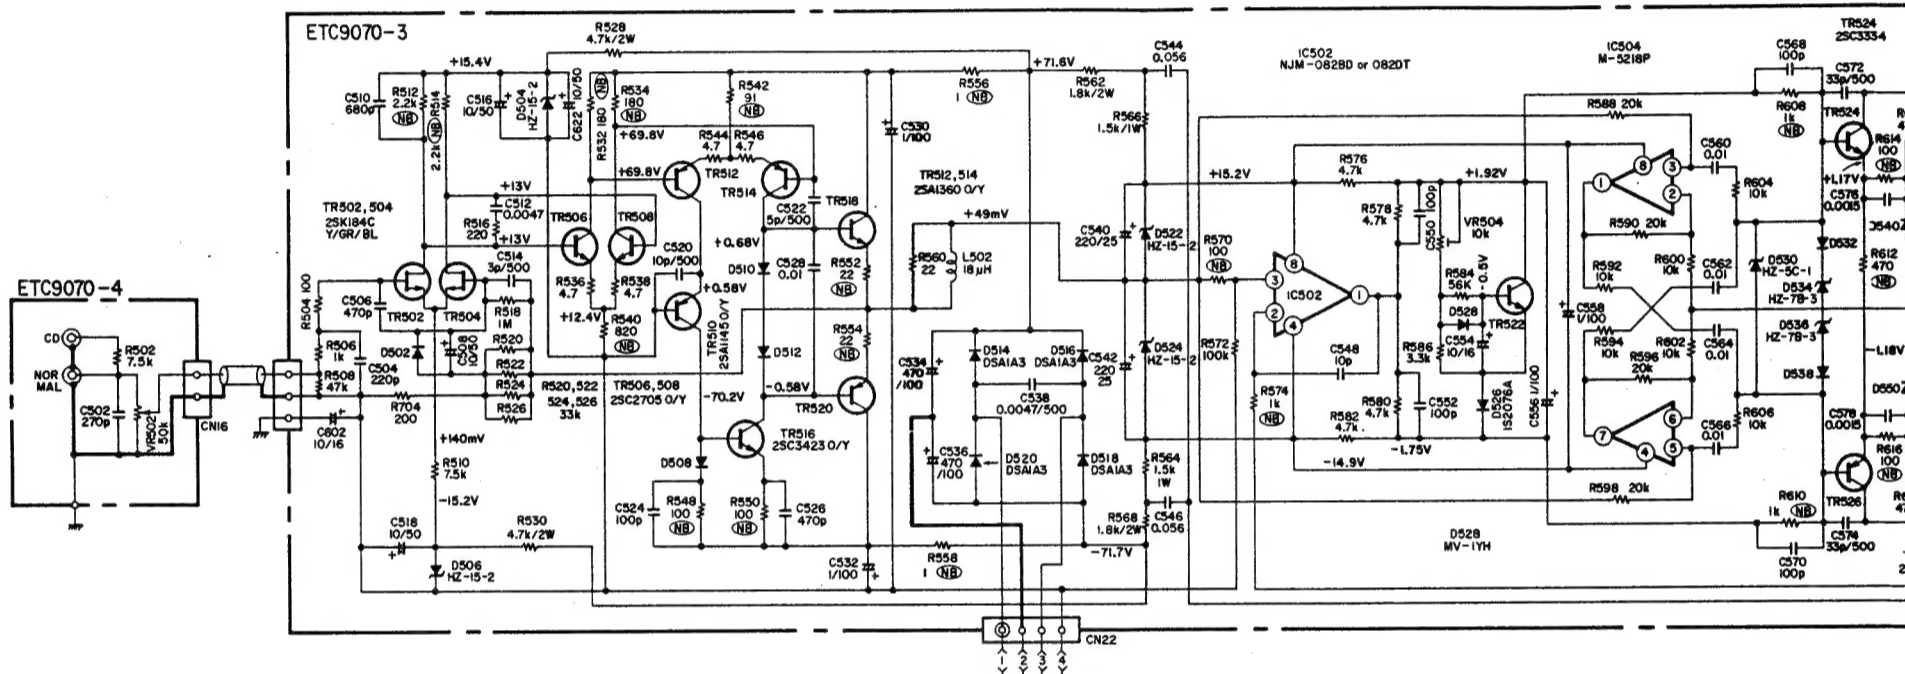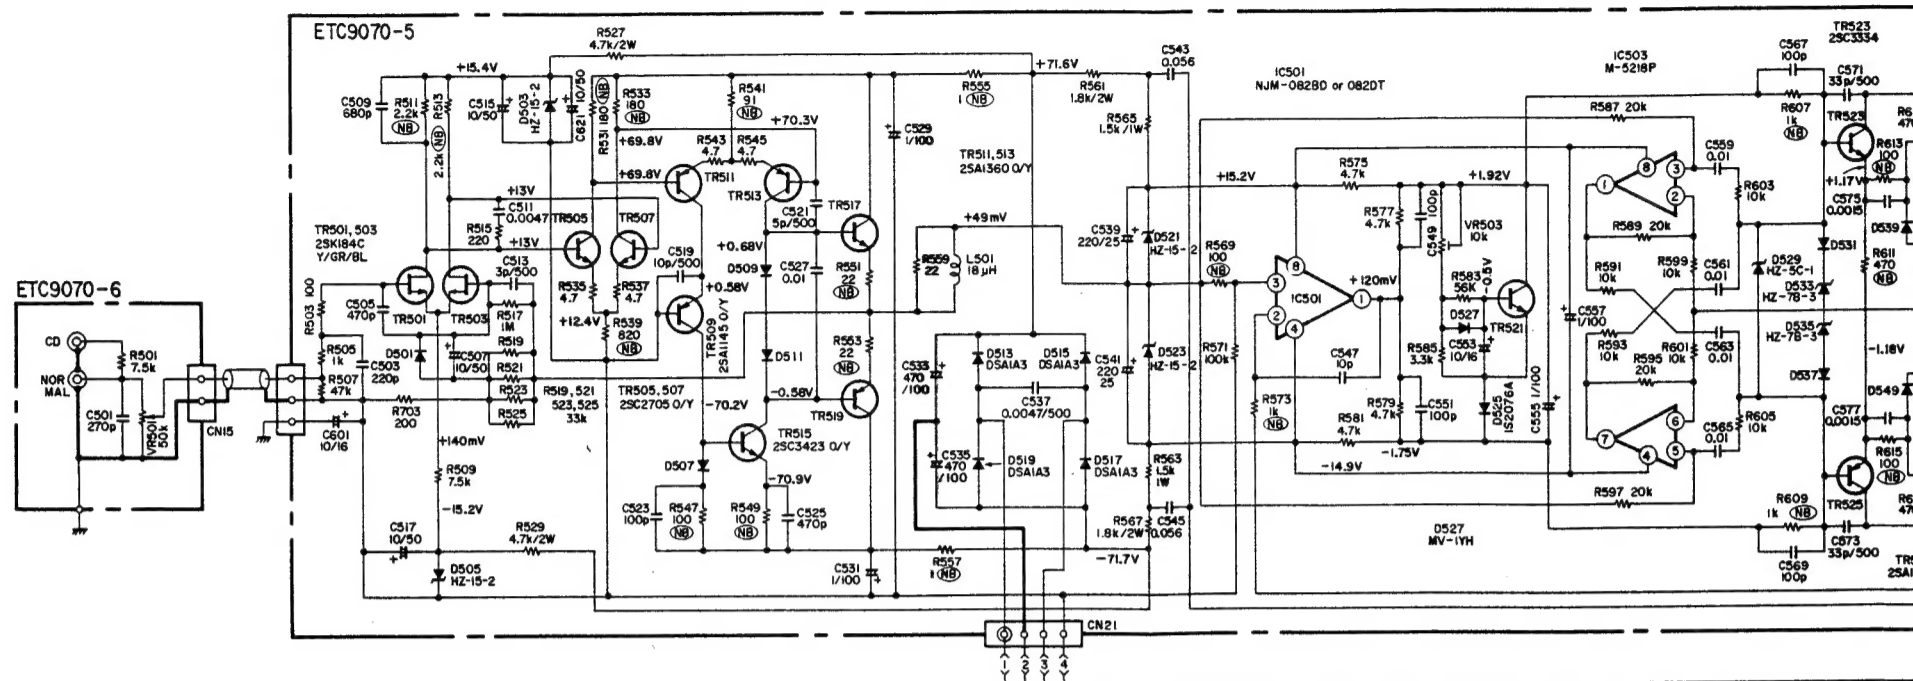

6

7


8

9

10

11

⚠ Means important safety item, which must be replaced, when necessary, by a part specified or meeting the specification by the manufacturer.

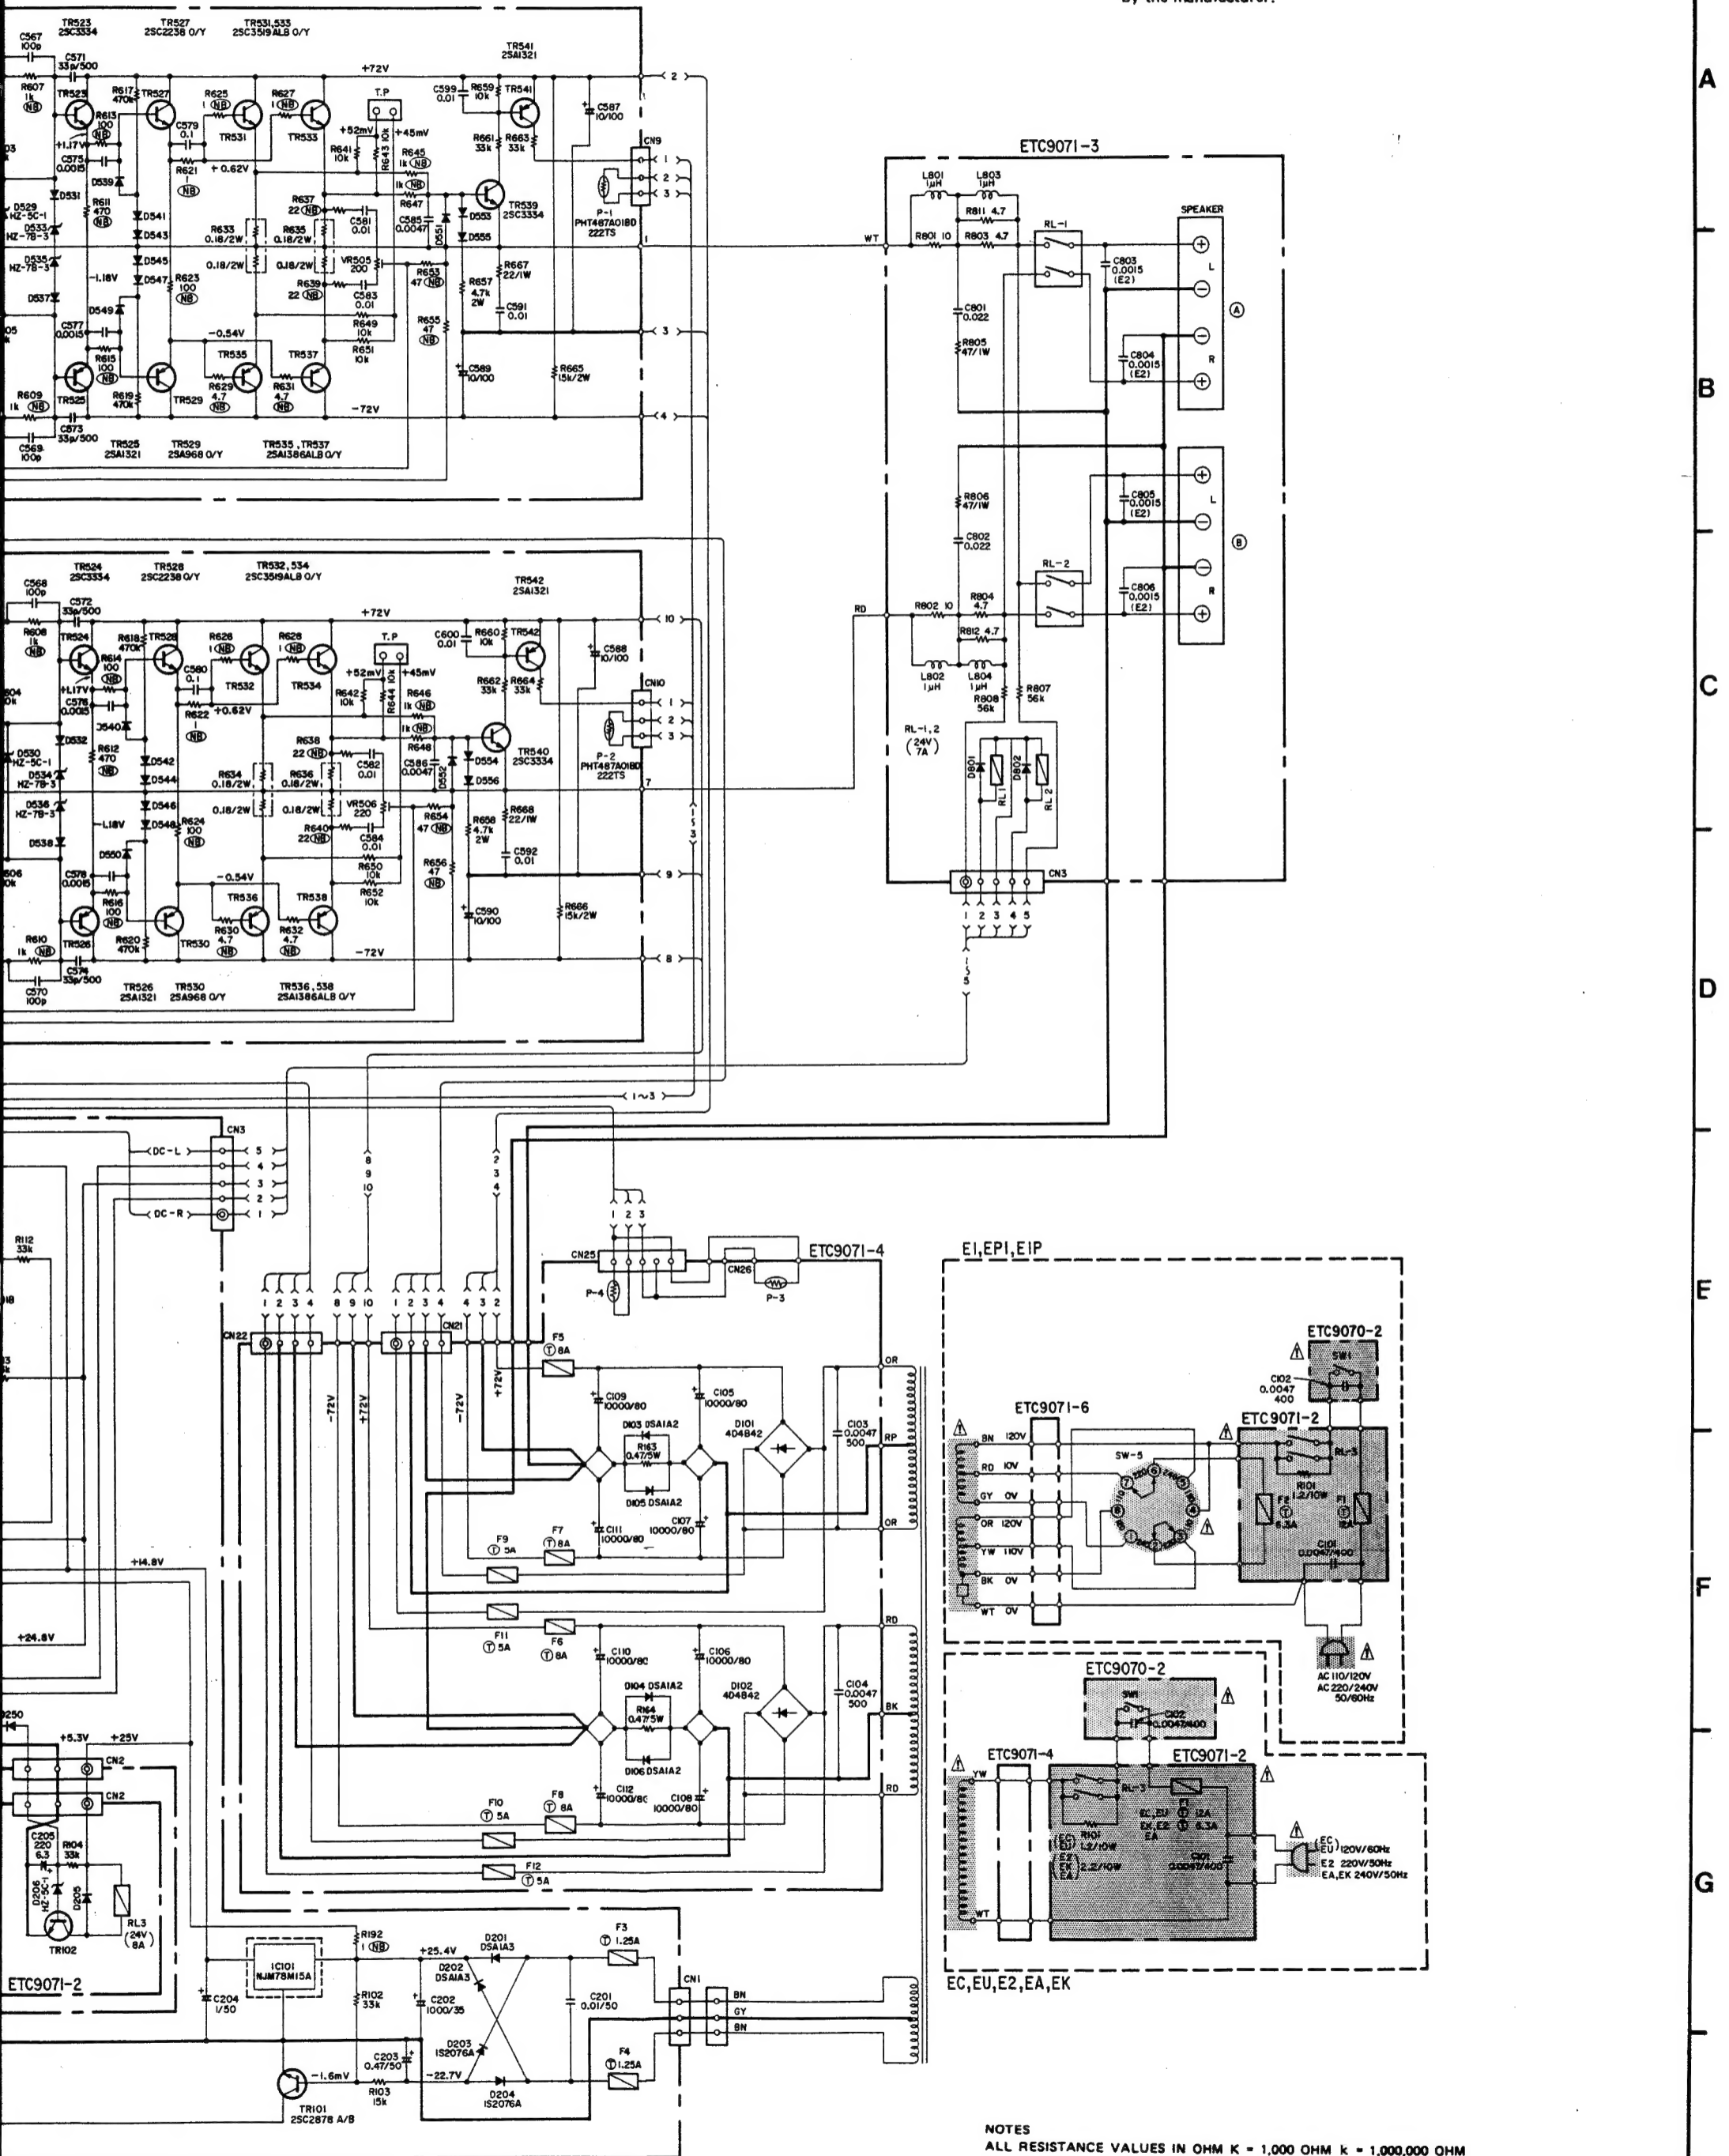


NOTES

ALL RESISTANCE VALUES IN OHM K = 1,000 OHM k = 1,000,000 OHM
 ALL CAPACITANCE VALUES IN MICRO FARAD P = MICRO-MICRO FARAD
 EACH VOLTAGE AND CURRENT ARE MEASURED AT NO SIGNAL INPUT CONDITION.
 CIRCUIT AND PARTS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

EXPLODED VIEW OF CHASSIS AND CABINET & PARTS LIST

EXPLODED VIEW OF CHASSIS AND CABINET

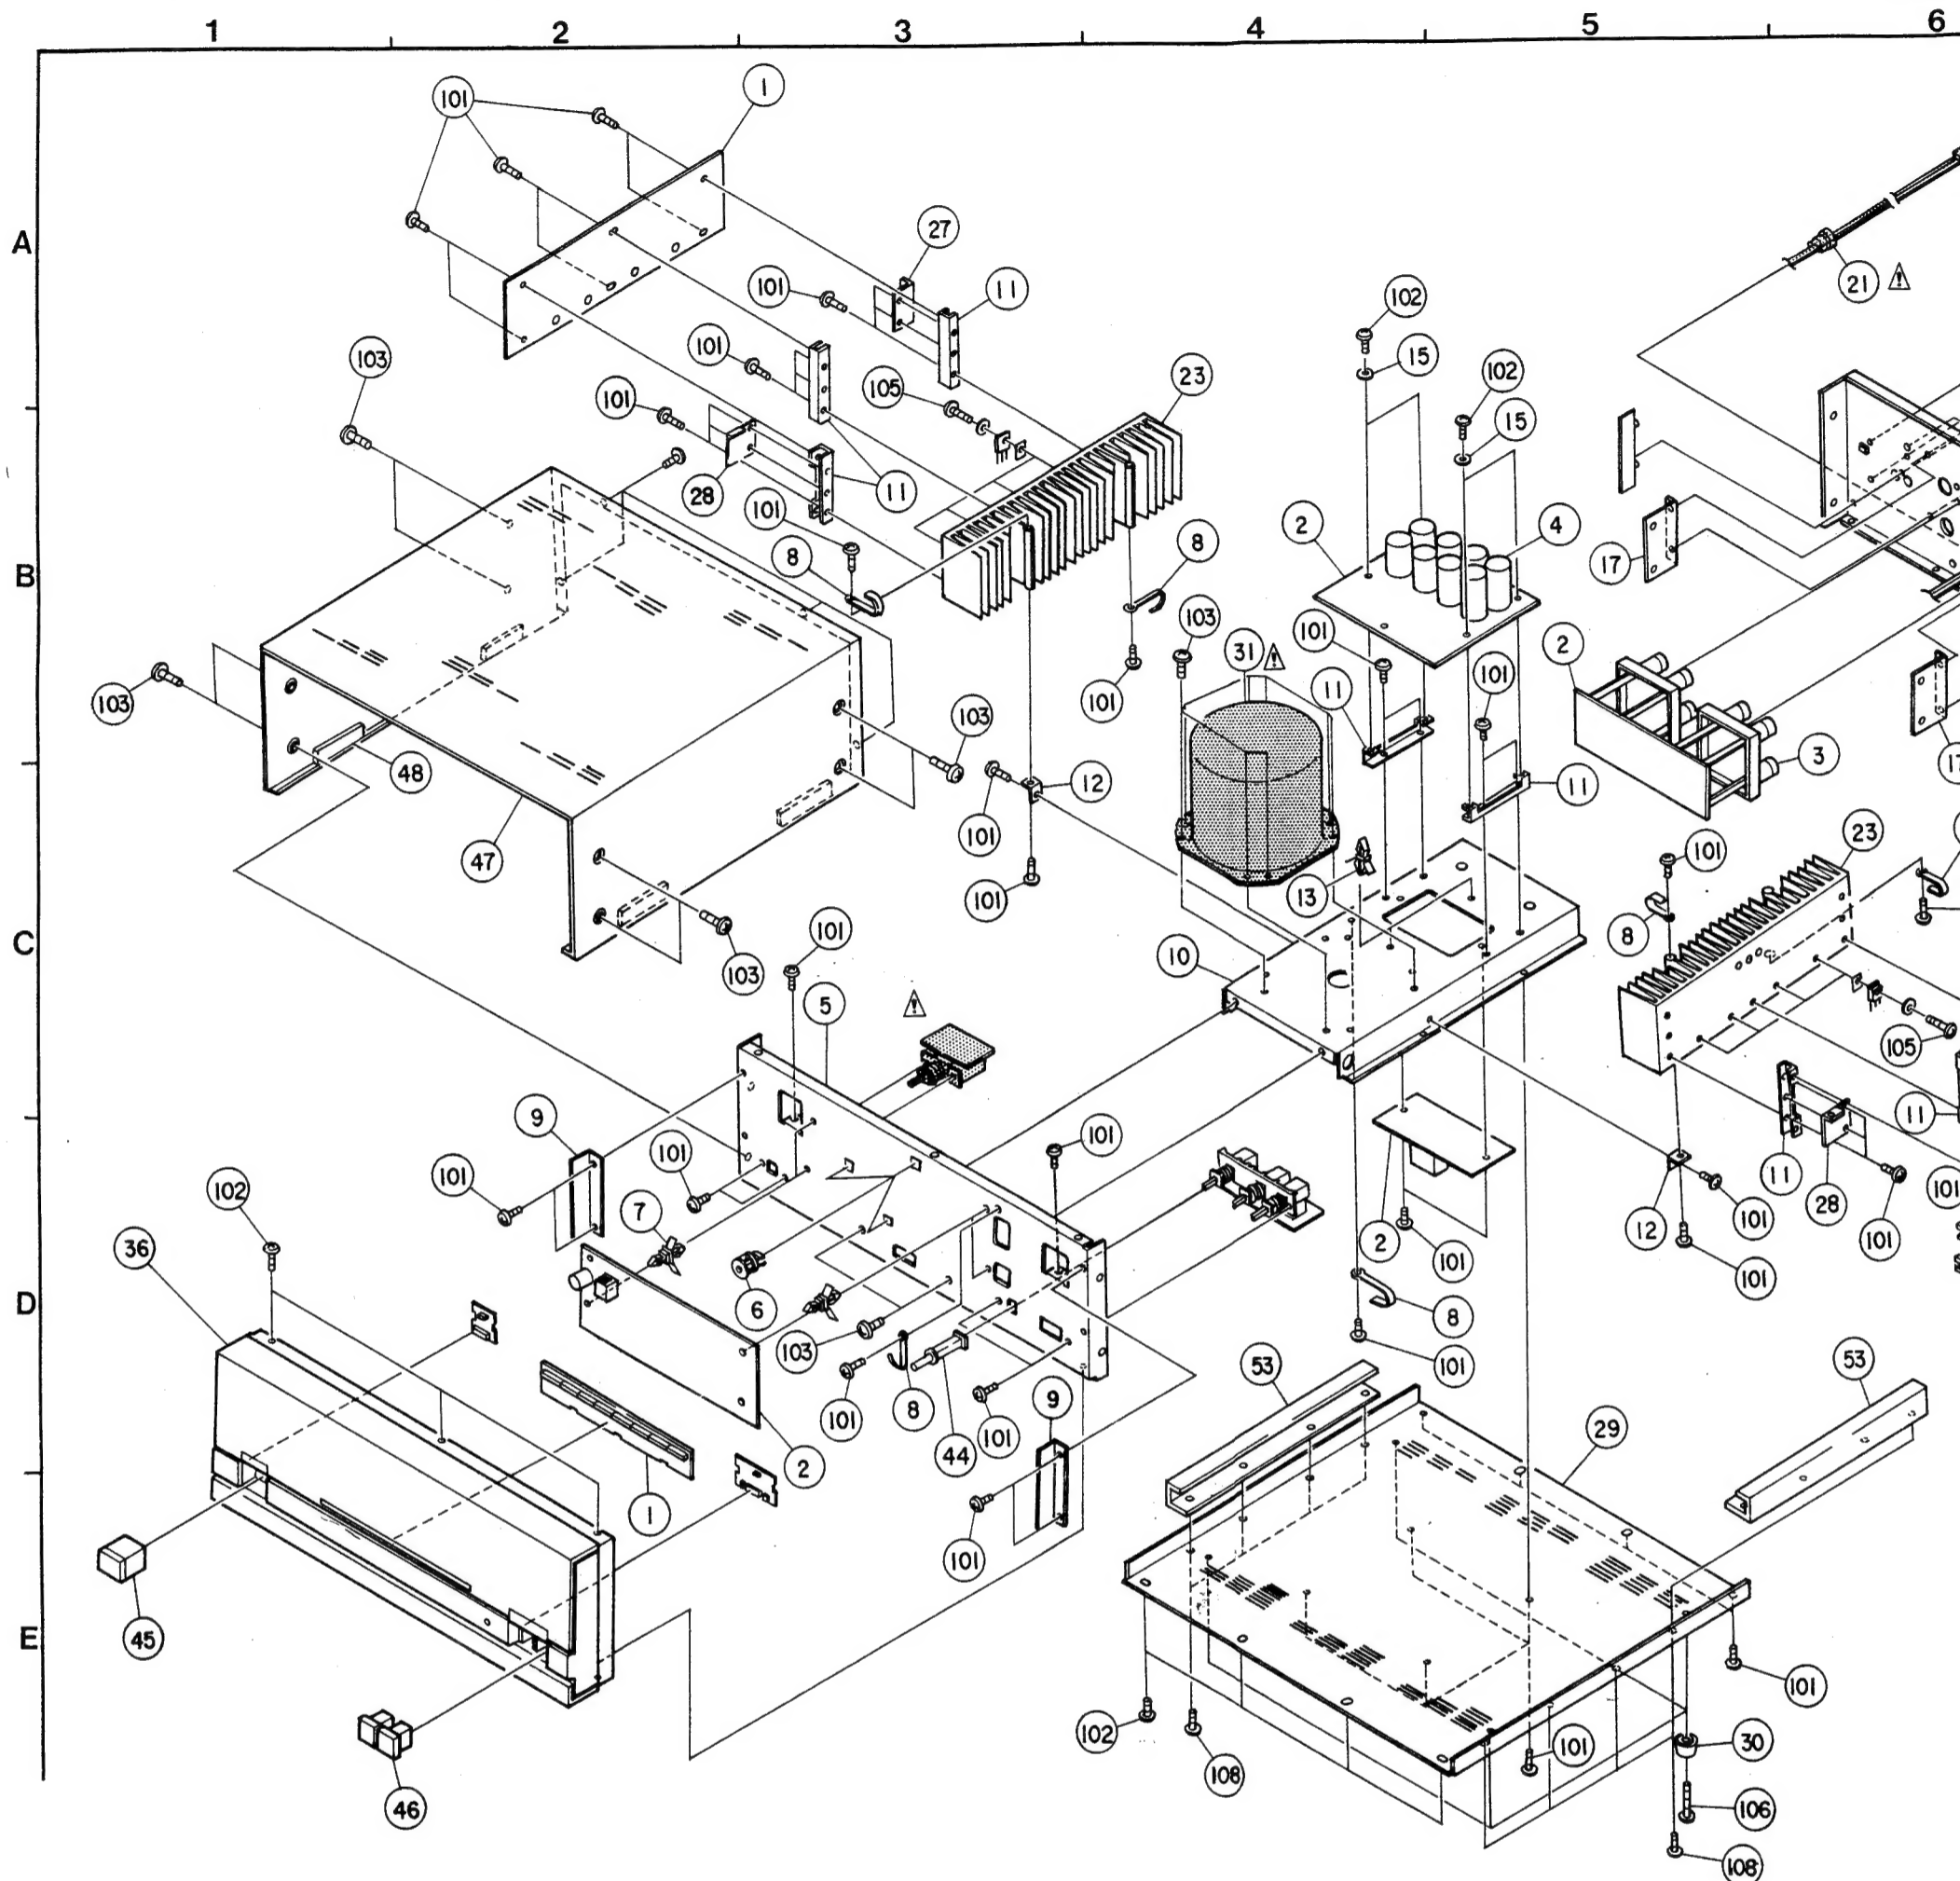

Note 1. See addendum list below for the parts with asterisk (*) on the Ref. No. and the other parts not included in the list.
 2. * marked not included EXPLODED VIEW OF CHASSIS AND CABINET*
 3. This list is prepared based on EU BLACK VERSION.

PARTS LIST OF EXPLODED VIEW


Ref. No.	Part No.	Part Name & Descriptions	Q'ty
*1	ETC9070	POWER UNIT	1
*2	ETC9071	SUPPLY UNIT	1
3	2050316001	4P TERMINAL	2
4	2546140005	10000μF ±20% 80V ELECTROLYTIC (C105~C112)	8
5	4119029101	FRONT CHASSIS	1
6	4439015002	P.W. SPACER	3
7	4159016019	P.C.B HOLDER	4
8	4450048016	CORD HOLDER (L50)	6
9	4121477000	BRACKET	2
10	4119028005	TRANS CHASSIS	1
11	4129062006	PWB SUPPORT BRACKET	8
12	4129059006	BRACKET	2
13	4159016006	P.C.B HOLDER	2
14	2034319011	3P CONNECTOR CORD	1
15	4159001008	F.S WASHER	4
*16	1059065008	BACK PANEL	1
17	4129041001	PWB SUPPORT	2
18	2038161003	5P CONNECTOR CORD	1
19	4159014008	PROTECTOR SHEET	2
*20	2062039004	AC CORD (POLARIZED)	1
*21	4450020005	CORD BUSH (4K-4)	1
22	1129024102	VR KNOB (LEVEL)	2
23	4179016002	POWER RADIATOR	2
24	2710181000	2SA1386ALB(O)/(Y)	4
25	2730300007	2SC3519ALB(O)/(Y)	4

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
26	4150234007	INSULATING SHEET	8
27	4129060008	RADIATOR BRACKET (R)	2
28	4129061007	RADIATOR BRACKET (F)	2
29	1059067200	BOTTOM COVER	1
30	1040027107	FOOT	4
*31	2339555004	POWER TRANS	1
32	2034318009	3P CONNECTOR CORD	1
33	2034318012	3P CONNECTOR CORD	1
*34	4450033005	WIRE CLAMP BAND	6
35	1229006017	SPACER	1
*36	1449036003	FRONT, PANEL	1
37	1469056005	ESC PLATE (P)	1
38	1469057004	ESC PLATE (SP)	1
39	1469061207	KNOB GUIDE (SP)	1
40	1469062206	KNOB GUIDE (P)	1
41	1439031102	LENS ASS'Y	1
42	1469059002	SIDE ESC PLATE (R)	1
43	1469060004	SIDE ESC PLATE (L)	1
44	1139087100	PUSH KNOB (PROTECTOR)	1
45	1139081106	PUSH KNOB ASS'Y (P)	1
46	1139084103	PUSH KNOB ASS'Y (SP)	2
47	1029016003	TOP COVER	1
48	4619001043	RUBBER SHEET	4
*49	5139148029	FUSE LABEL	1
*50	5139148032	FUSE LABEL	1

Ref. No.	Part No.	Part Name & Descriptions	Q'ty
*51	5139148003	FUSE LABEL	1
*52	5139148016	FUSE LABEL	1
53	4129081100	SUPPORT BRACKET	1
SCREWS & WASHER			
*101	4737002034	TAPPING SCREW (S) 3x6 (BLACK)	7
102	4737002021	TAPPING SCREW (S) 3x8 (BLACK)	1
103	4737007000	TAPPING SCREW (S) 4x8 (BLACK)	2
104	4737500044	TAPPING SCREW (P) 3x8 (BLACK)	1
105	4700012022	CROSS PAN SCREW WITH S.W. W 3x12	1
106	4737007039	TAPPING SCREW (S) 4x20 (BLACK)	1
107		NUT M7	1
108	4737002005	TAPPING SCREW (S) 3x6	1
PACKING & ACCESSORIES (not included EXPLODED VIEW)			
*201	5138266009	DANGEROUS MARK	1
*202	5138300004	LA APPROVAL MARK	1
203	5049102003	STYLEN PAPER	1
204	5050075051	CABINET COVER	1
205	5039126109	CUSHION	1
206	5019128004	CARTON CASE	1
207	5119179005	INST MANUAL	1
*208	5150349108	WARRANTY IN ENVELOPE	1

⚠ Means important safety item, which must be replaced, when necessary, by a part specified or meeting the specification by the manufacturer.

DENON

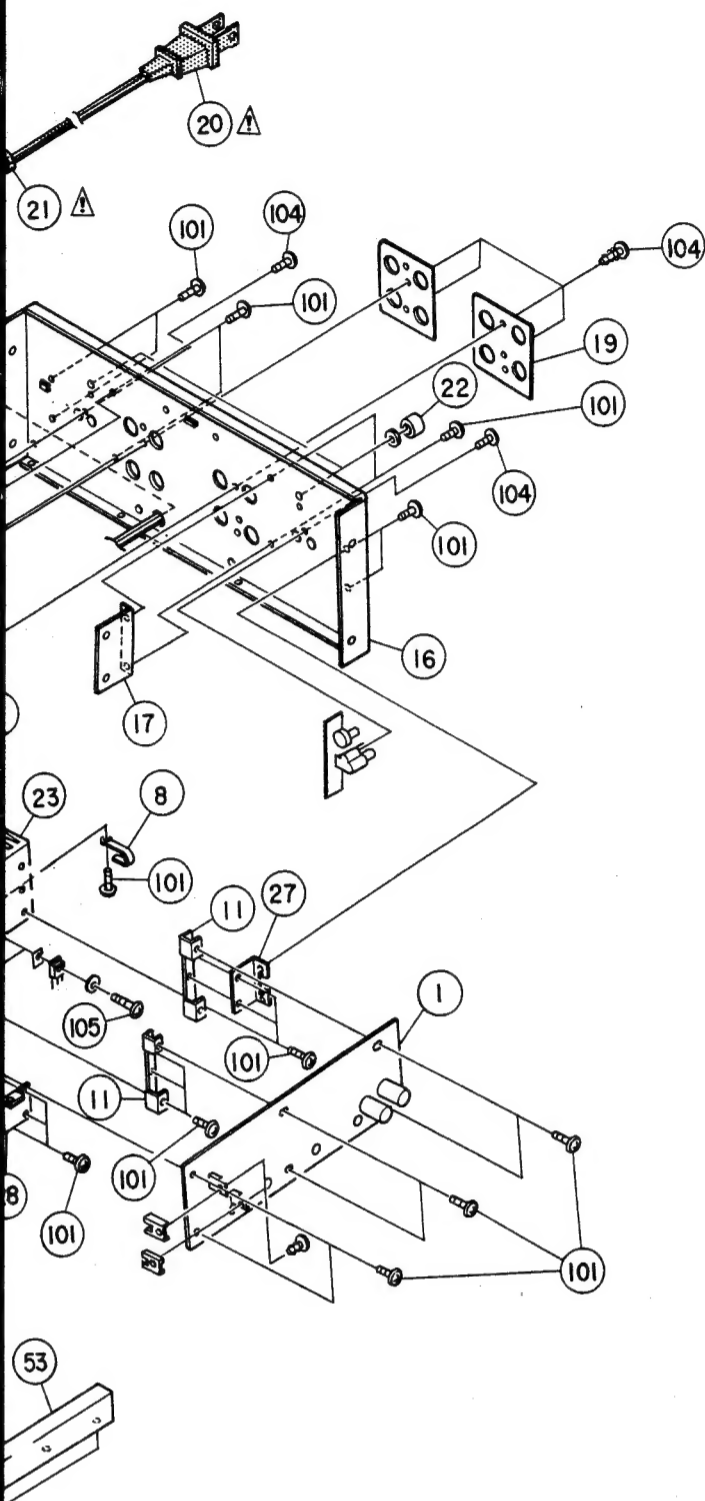

WARNING:

1. Component parts

Parts marked with ⚠ and/or shading in this service manual have special characteristics important to safety. Be sure to use the specified parts for replacement.

2. Leakage current

Before returning the appliance to customer, test the leakage current when the power plug is connected. Use a calibrated (with an error of not more than 5%) leakage current tester and measure the leakage current from any exposed metal to the earth ground. Reverse the power plug polarity and test the above again.

Any current measured MUST NOT EXCEED 0.5 milliamps. Corrective measure must be taken if it exceeds the limit.



CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.



The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user of the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user of the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

ADDENDUM LIST

Ref. No.	Part Name & Descriptions	Part No.		
		EP for PX(multi. voltage)	E2 for Europe	
1	POWER UNIT	ETC9070	ETC9070B	
2	SUPPLY UNIT	ETC9071D	ETC9071B	
16	BACK PANEL	1059065011	1059065024	
20	AC CORD	2006031026	2062002031	
31	POWER TRANS.	2339558001	2339559000	
34	WIRE CLAMP BAND	4450033005(10)	4450033005(6)	
36	FRONT PANEL	1449036003	1449036003	
60	VOLTAGE SEL SW	2120186006	—	
61	BRACKET (B)	4129065003	—	
62	SAFETY COVER	4149022000	—	
63	PUSH RIVET	4770210016(2)	—	
64				
101	TAPPING SCREW (S) 3x6 (BLACK)	4737002034(81)	4737002034(75)	
201	DANGEROUS MARK	—	—	
202	LA APPROVAL MARK	—	—	
208	WARRANTY IN ENVELOPE	5158052206	—	
209	CONTROL CARD	—	5138295009	
210	COLOR LABEL (BLACK)	—	5139111014(2)	
211	PRESET LABEL	5150290008	—	

Options	Q'ty
	1
	1
	2
(BLACK)	75
(BLACK)	11
(BLACK)	20
(BLACK)	6
H S.W, W	8
20 (BLACK)	4
	2
	8
LODED VIEW)	
	1
	1
	1
	1
	2
	1
	1
	1
DOPE	1

NIPPON COLUMBIA CO., LTD.
No. 14-14, 4-CHOME AKASAKA,
MINATO-KU, TOKYO 107 JAPAN

TEL: 03-584-8111
TLX: JAPANOLA J22591
CABLE: NIPPONCOLUMBIA TOKYO

Printed in Japan 606 BU 0039